

# The L<sub>3</sub> project

Advanced Compiler Construction  
Michel Schinz - 2013-02-21

1

## Project overview

What you will get (as the semester progresses):

- parts of an L<sub>3</sub> compiler written in Scala, and
- parts of a virtual machine, written in C.

What you will have to do:

- one non-graded exercise to warm you up,
- complete the compiler,
- complete the virtual machine.

2

## The L<sub>3</sub> language

3

## The L<sub>3</sub> language

L<sub>3</sub> is a **Lisp-like** language. Its main characteristics are:

- it is "dynamically typed",
- it is functional:
  - functions are first-class values, and can be nested,
  - there are few side-effects (exceptions: mutable blocks and I/O),
- it automatically frees memory,
- it has six kinds of values: unit, booleans, characters, integers, blocks and functions,
- it is simple but quite powerful.

4

## A taste of L<sub>3</sub>

An L<sub>3</sub> function to compute  $x^y$  for  $x \in \mathbb{Z}, y \in \mathbb{N}$ :

```
(defrec pow
  (fun (x y)
    (cond ((= 0 y) 1)
          ((= 0 (% y 2))
           (let ((t (pow x (/ y 2))))
             (* t t)))
          (#t
           (* x (pow x (- y 1)))))))
```

$x^0 = 1$

$x^{2z} = (x^z)^2$

$x^{z+1} = x(x^z)$

5

## Top-level definitions

**(def n e)**

Top-level non-recursive definition. The expression  $e$  is evaluated and its value is bound to name  $n$  in the rest of the program. The name  $n$  is *not* visible in expression  $e$ .

**(defrec n f)**

Top-level recursive *function* definition. The function expression  $f$  is evaluated and its value is bound to name  $n$  in the rest of the program. The function can be recursive, i.e. the name  $n$  is visible in the function expression  $f$ .

6

## Local definitions

**(let ((n<sub>1</sub> e<sub>1</sub>) (n<sub>2</sub> e<sub>2</sub>) ...) b<sub>1</sub> ... b<sub>k</sub>)**

Parallel local value definition. The expressions  $e_1, e_2, \dots$  are evaluated in that order, and their values are then bound to names  $n_1, \dots$  in the body  $b_1, \dots, b_k$ . The value of the whole expression is the value of  $b_k$ .

**(let\* ((n<sub>1</sub> e<sub>1</sub>) (n<sub>2</sub> e<sub>2</sub>) ...) b<sub>1</sub> ... b<sub>k</sub>)**

Sequential local value definition. Equivalent to a nested sequence of **let**: **(let ((n<sub>1</sub> e<sub>1</sub>)) (let ((n<sub>2</sub> e<sub>2</sub>)) ...))**

**(letrec ((n<sub>1</sub> f<sub>1</sub>) (n<sub>2</sub> f<sub>2</sub>) ...) b<sub>1</sub> ... b<sub>k</sub>)**

Recursive local function definition. The function expressions  $f_1, f_2, \dots$  are evaluated and bound to names  $n_1, n_2, \dots$  in the body  $b_1, \dots, b_k$ . The functions can be mutually recursive.

7

## Functions

**(fun (n<sub>1</sub> n<sub>2</sub> ...) b<sub>1</sub> ... b<sub>k</sub>)**

Anonymous function with arguments  $n_1, n_2, \dots$  and body  $b_1, \dots, b_k$ . The return value of the function is the value of  $b_k$ .

**(e e<sub>1</sub> e<sub>2</sub> ...)**

Function application. Expressions  $e, e_1, e_2, \dots$  are evaluated in that order, and then the value of  $e$  - which must be a function - is applied to the value of  $e_1, e_2, \dots$

8

## Conditional expressions

**(if**  $e_1$   $e_2$   $e_3$ )

Two-ways conditional. If  $e_1$  evaluates to a true value (i.e. anything but **#f**),  $e_2$  is evaluated, else  $e_3$  is evaluated. The value of the whole expression is the value of the evaluated branch.

**(cond** ( $c_1$   $e_1$ ) ( $c_2$   $e_2$ ) ...)

N-ways conditional. If  $c_1$  evaluates to a true value, evaluate  $e_1$ ; else, if  $c_2$  evaluates to a true value, evaluate  $e_2$ ; etc. The value of the whole expression is the value of the evaluated branch.

9

## Logical expressions

**(and**  $e_1$   $e_2$ )

Equivalent to **(if**  $e_1$   $e_2$  **#f**).

**(or**  $e_1$   $e_2$ )

Equivalent to **(let** (( $v_1$   $e_1$ )) **(if**  $v_1$   $v_1$   $e_2$ )), where  $v_1$  is a fresh name.

**(not**  $e$ )

Equivalent to **(if**  $e$  **#f** **#t**).

10

## Loops and blocks

**(rec**  $n$  (( $n_1$   $e_1$ ) ( $n_2$   $e_2$ ) ...)  $b_1$   $b_2$  ...)

General loop. Equivalent to:

**(letrec** (( $n$  (**fun** ( $n_1$   $n_2$  ...)  $b_1$   $b_2$  ...)))  
( $n$   $e_1$   $e_2$  ...))

**(begin**  $b_1$   $b_2$  ...  $b_k$ )

Sequential evaluation. First evaluate expression  $b_1$ , discarding its value, then  $b_2$ , etc. Finally evaluate  $b_k$ , whose value is the value of the whole expression.

11

## Literal values

" $c_1c_2\dots c_n$ "

String literal (translated to a block expression, see later).

' $c$ '

Character literal.

... -2 -1 0 1 2 3 ...

Integer literals.

**#t** **#f**

Boolean literals (true and false, respectively).

**#u**

Unit literal.

12

## Primitives

(@ p e<sub>1</sub> e<sub>2</sub> ...)

Primitive application. First evaluate expressions e<sub>1</sub>, e<sub>2</sub>, ... in that order, and then apply primitive p to the value of these expressions.

L<sub>3</sub> offers the following primitives:

- integer: + - \* / % < <= > >= int->char
- polymorphic comparison: = !=
- type tests: block? int? char? bool? unit?
- character: char-read char-print char->int
- tagged blocks (see later): block-alloc-n  
block-tag block-length  
block-get block-set!

13

## Valid primitive arguments

Primitives only work correctly when applied to certain types of arguments, otherwise their behavior is undefined.

+ - \* / % : int \* int ⇒ int

< <= > >= : int \* int ⇒ bool

= != : ∀α, β. α \* β ⇒ bool

int->char : int ⇒ char

char->int : char ⇒ int

block? int? char? bool? unit? : ∀α. α ⇒ bool

char-read : ⇒ char

char-print : char ⇒ unit

14

## Valid primitive arguments

block-alloc-n : int ⇒ block

block-tag block-length : block ⇒ int

block-get : ∀α. block\*int ⇒ α

block-set! : ∀α. block\*int\*α ⇒ unit

15

## Tagged blocks

L<sub>3</sub> offers a single structured datatype: tagged blocks. They are manipulated with the following primitives:

(@ block-alloc-n s)

Allocates an uninitialized block with tag n and length s.

(@ block-tag b)

Returns the tag of block b (as an integer).

(@ block-length b)

Returns the length of block b.

(@ block-get b n)

Returns the n<sup>th</sup> element (0-based) of block b.

(@ block-set! b n v)

Sets the n<sup>th</sup> element (0-based) of block b to v.

16

## Using tagged blocks

Tagged blocks are a low-level data structure. They are not meant to be used directly in programs, but rather as a means to implement more sophisticated data structures like strings, arrays, lists, etc.


The valid tags range from 0 to 255, inclusive. Tags  $\geq 200$  are reserved by the compiler, while the others are available for general use. (For example, our L<sub>3</sub> library uses a few tags to represent arrays, lists, etc.)

17

## Grasping the syntax

Like all Lisp-like languages, L<sub>3</sub> "has no syntax", in that its concrete syntax is very close to its abstract syntax.

For example, the L<sub>3</sub> expression on the left is almost a direct transcription of a pre-order traversal of its AST on the right, in which nodes are parenthesized and tagged, while leaves are unadorned.

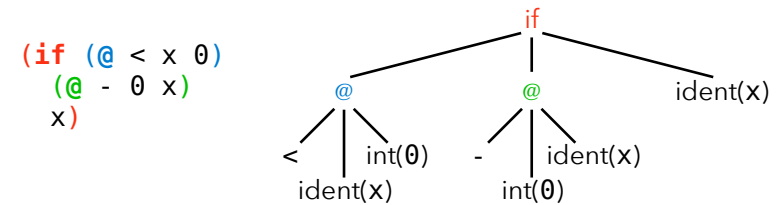

18

## L<sub>3</sub> EBNF grammar (1)

```
program ::= { def | defrec | expr }
def ::= (def ident expr)
defrec ::= (defrec ident fun)
expr ::= fun | let | let* | letrec | rec | begin | if | cond | and | or
        | not | app | prim | ident | num | str | chr | bool | unit
exprs ::= expr { expr }
fun ::= (fun ({ ident }) exprs)
let ::= (let ({ (ident expr) }) exprs)
let* ::= (let* ({ (ident expr) }) exprs)
letrec ::= (letrec ({ (ident fun) }) exprs)
rec ::= (rec ident ({ (ident expr) }) exprs)
begin ::= (begin exprs)
```

19

## L<sub>3</sub> EBNF grammar (2)

```
if ::= (if expr expr [ expr ])
cond ::= (cond (expr expr) {(expr expr)})
and ::= (and expr expr)
or ::= (or expr expr)
not ::= (not expr)
app ::= (expr { expr })
prim ::= (@ prim-name { expr })
```

20

## L<sub>3</sub> EBNF grammar (3)

```
str ::= "{any character except newline}"
chr ::= 'any character'
num ::= [-] digit { digit }
bool ::= #t | #f
unit ::= #u
ident ::= identstart { identstart | digit }
identstart ::= a | ... | z | A | ... | Z | | ! | % | & | * | + | -
| . | / | : | < | = | > | ? | ^ | _ | ~
digit ::= 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9
prim-name ::= function? | block-alloc-n | block?
| block-tag | block-length | block-get | block-set!
| int? | + | - | * | / | % | < | <= | = | != | >= | >
| char-read | char-print | bool? | not | unit?
```

$0 \leq n \leq 255$

21

## Exercises

Write the L<sub>3</sub> version of the factorial function, defined as:

```
fact(0) = 1
fact(n) = n · fact(n - 1) [if n > 0]
```

What does the following (valid) L<sub>3</sub> program compute?

```
((fun (f x) (f x))
 (fun (x) (@+ x 1))
 20)
```

22

## L<sub>3</sub> syntactic sugar

23

## L<sub>3</sub> syntactic sugar

L<sub>3</sub> has a substantial amount of **syntactic sugar**: constructs that can be syntactically translated to other existing constructs. Syntactic sugar does not offer additional expressive power to the programmer, but some syntactical convenience.

For example, L<sub>3</sub> allows **if** expressions without an else branch, which is implicitly taken to be the unit value **#u**:

```
(if e1 e2) ⇔ (if e1 e2 #u)
```

24

# Desugaring

Syntactic sugar is typically removed very early in the compilation process - e.g. during parsing - to simplify the language that the compiler has to handle.

This process is known as **desugaring**.

Desugaring can be specified using rewriting rules that rewrite a sugared term into a (partially) desugared one.

For example, **if** expressions without an else branch can be desugared using the following rewriting rule:

$(\mathbf{if} \ e_1 \ e_2) \rightsquigarrow_{\text{ds}} (\mathbf{if} \ e_1 \ e_2 \ \#\mathbf{u})$

25

# L<sub>3</sub> desugaring (1)

To simplify the rewriting rules for whole programs, we assume that all top-level expressions are wrapped sequentially in a **(program ...)** expression.

$(\mathbf{program} \ \dots \ (\mathbf{def} \ n \ e) \ b)$

$\rightsquigarrow_{\text{ds}} (\mathbf{program} \ \dots \ (\mathbf{let} \ ((n \ e)) \ b))$

$(\mathbf{program} \ \dots \ (\mathbf{defrec} \ n \ f) \ b)$

$\rightsquigarrow_{\text{ds}} (\mathbf{program} \ \dots \ (\mathbf{letrec} \ ((n \ f)) \ b))$

$(\mathbf{program} \ \dots \ e_1 \ e_2)$

$\rightsquigarrow_{\text{ds}} (\mathbf{program} \ \dots \ (\mathbf{begin} \ e_1 \ e_2))$

26

# L<sub>3</sub> desugaring (2)

$(\mathbf{let}^* \ ((n_1 \ e_1)) \ b)$

$\rightsquigarrow_{\text{ds}} (\mathbf{let} \ ((n_1 \ e_1)) \ b)$

$(\mathbf{let}^* \ ((n_1 \ e_1) \ (n_2 \ e_2) \ \dots) \ b)$

$\rightsquigarrow_{\text{ds}} (\mathbf{let} \ ((n_1 \ e_1)) \ (\mathbf{let}^* \ ((n_2 \ e_2) \ \dots) \ b))$

$(\mathbf{let}^* \ ((n_1 \ e_1) \ \dots) \ b_1 \ \dots)$

$\rightsquigarrow_{\text{ds}} (\mathbf{let}^* \ ((n_1 \ e_1) \ \dots) \ (\mathbf{begin} \ b_1 \ \dots))$

$(\mathbf{let} \ ((n_1 \ e_1) \ \dots) \ b_1 \ \dots)$

$\rightsquigarrow_{\text{ds}} (\mathbf{let} \ ((n_1 \ e_1) \ \dots) \ (\mathbf{begin} \ b_1 \ \dots))$

$(\mathbf{letrec} \ ((n_1 \ f_1) \ \dots) \ b_1 \ \dots)$

$\rightsquigarrow_{\text{ds}} (\mathbf{letrec} \ ((n_1 \ f_1) \ \dots) \ (\mathbf{begin} \ b_1 \ \dots))$

27

# L<sub>3</sub> desugaring (3)

To avoid non-termination of the desugaring process, we suppose that functions bound by a **defrec** or **letrec** are tagged - e.g. during parsing - with a hash sign (#).

$(\mathbf{fun} \ (n_1 \ \dots) \ b_1 \ b_2 \ \dots)$

$\rightsquigarrow_{\text{ds}} (\mathbf{letrec} \ ((\underline{\mathbf{f}} \ (\mathbf{fun}^\# \ (n_1 \ \dots) \ b_1 \ b_2 \ \dots))) \ \mathbf{f})$

$(\mathbf{rec} \ n \ ((n_1 \ e_1) \ (n_2 \ e_2) \ \dots) \ b_1 \ b_2 \ \dots)$

$\rightsquigarrow_{\text{ds}} (\mathbf{letrec} \ ((n \ (\mathbf{fun}^\# \ (n_1 \ n_2 \ \dots) \ b_1 \ b_2 \ \dots)) \ (n \ e_1 \ e_2 \ \dots))$

$(\mathbf{fun}^\# \ (n_1 \ \dots) \ b_1 \ b_2 \ \dots)$

$\rightsquigarrow_{\text{ds}} (\mathbf{fun}^\# \ (n_1 \ \dots) \ (\mathbf{begin} \ b_1 \ b_2 \ \dots))$

underlined names are fresh

28

## L<sub>3</sub> desugaring (4)

```
(begin e)
  ↪ds e
(begin e1 e2 ...)
  ↪ds (let ((n e1)) (begin e2 ...))
(if c e)
  ↪ds (if c e #u)
(cond (c1 e1))
  ↪ds (if c1 e1)
(cond (c1 e1) (c2 e2) ...)
  ↪ds (if c1 e1 (cond (c2 e2) ...))
```

29

## L<sub>3</sub> desugaring (5)

```
(and e1 e2)
  ↪ds (if e1 e2 #f)
(or e1 e2)
  ↪ds (let ((v e1)) (if v v e2))
(not e)
  ↪ds (if e #f #t)
```

30

## L<sub>3</sub> desugaring (6)

L<sub>3</sub> does not have a string type. It offers string literals, though, which are desugared to blocks containing characters.

```
"C1C2...Cn"
  ↪ds (let ((s (@block-alloc-200 n)))
        (@block-set! s 0 'C1')
        (@block-set! s 1 'C2')
        ...
        s)
```

the (reserved)  
tag 200 is used for  
strings

31

## Desugaring contexts

Desugaring rules cannot be applied anywhere, but only in specific locations. For example, it would be incorrect to try to desugar the parameter list of a function.

This constraint can be captured by specifying all the **contexts** in which it is valid to perform a rewrite, where a context is a term with a single **hole** denoted by  $\square$ .

The hole of a context C can be plugged with a term T, an operation written as C{T}.

For example, if C is (if  $\square$  1 2), then C{(< x y)} is (if (< x y) 1 2).

32



## Desugaring contexts

All the contexts  $C_{ds}$  in which it is legal to apply the desugaring rewrite rule  $\rightsquigarrow_{ds}$  are generated by the following grammar:

```
Cds ::= □
| (program Cds)
| (let ((n1 e1) ... (ni Cds) ... (nk ek)) e)
| (let ((n1 e1) ... (nk ek)) Cds)
| (letrec ((n1 f1) ... (ni Cds) ... (nk fk)) e)
| (letrec ((n1 f1) ... (nk fk)) Cds)
| (fun# (n1 ... nk) Cds)
| (if Cds e2 e3) | (if e1 Cds e3) | (if e1 e2 Cds)
| (Cds e1 ... ek) | (e e1 ... Cds ... ek)
| (@ p e1 ... Cds ... ek)
```

33

## Desugaring relation

Having defined the desugaring rewrite rules and the valid desugaring contexts, it is now easy to specify the desugaring relation that maps a sugared program to a (partially) desugared program:

$$C_{ds}\{T\} \Rightarrow_{ds} C_{ds}\{T'\} \text{ where } T \rightsquigarrow_{ds} T'$$

Completely desugaring a program amounts to reducing it using the desugaring relation until it cannot be reduced further.

34

## L<sub>3</sub> desugaring example

```
(program (char-print (if #t 'o' 'k'))
          (char-print (if #f 'o' 'k'))))
```

```
 $\Rightarrow_{ds}$ (program
  (begin (char-print (if #t 'o' 'k'))
          (char-print (if #f 'o' 'k'))))
```

```
 $\Rightarrow_{ds}$ (program
  (let ((t (char-print (if #t 'o' 'k'))))
        (char-print (if #f 'o' 'k'))))
```

```
 $\not\Rightarrow_{ds}$  cannot be
rewritten further
```

35

## L<sub>3</sub> desugaring exercise

Desugar the following L<sub>3</sub> expression by applying the desugaring relation until you get a term that cannot be rewritten anymore:


```
(rec loop ((i 1))
  (int-print i)
  (if (< i 9)
      (loop (+ i 1))))
```

36

# The L<sub>3</sub> compiler

37

## L<sub>3</sub> compiler architecture

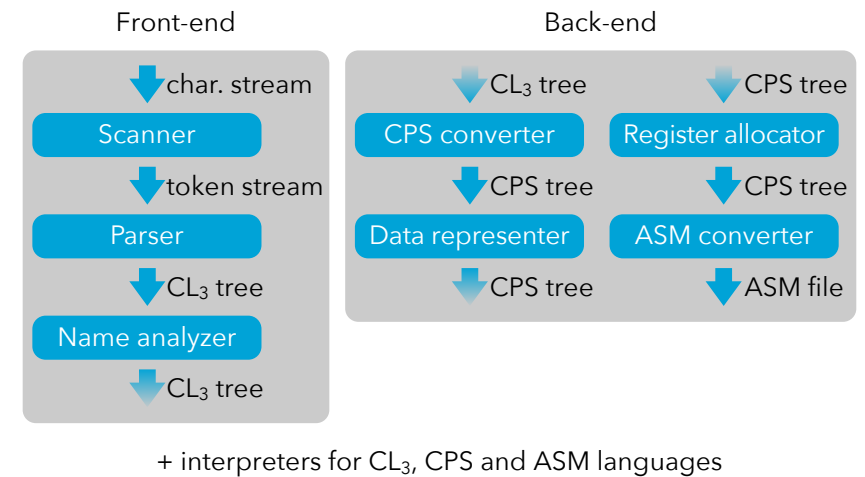

38

## Intermediate languages

The L<sub>3</sub> compiler manipulates a total of four languages:

1. L<sub>3</sub> is the source language that is parsed,
2. CL<sub>3</sub> (a.k.a. CoreL<sub>3</sub>) is the desugared version of L<sub>3</sub>,
3. CPS is the main intermediate language, on which optimizations are performed,
4. ASM is the assembly language of the target (virtual) machine.

The compiler contains interpreters for the last three languages, which is useful to check that a program behaves in the same way as it undergoes transformation.

These interpreters also serve as semantics for their language.

39