

Interpreters and virtual machines

Advanced Compiler Construction
Michel Schinz - 2013-04-11

Interpreters

Interpreter

An **interpreter** is a program that executes another program, represented as some kind of data-structure.

Common program representations include:

- raw text (source code),
- trees (AST of the program),
- linear sequences of instructions.

Interpreters enable the execution of a program without requiring its compilation to native code.

They simplify the implementation of programming languages and - on modern hardware - are efficient enough for many tasks.

Text-based interpreters

Text-based interpreters directly interpret the textual source of the program.

They are very seldom used, except for trivial languages where every expression is evaluated at most once – i.e. languages without loops or functions.

Plausible example: a calculator program, which evaluates arithmetic expressions while parsing them.

Tree-based interpreters

Tree-based interpreters walk over the abstract syntax tree of the program to interpret it.

Their advantage compared to string-based interpreters is that parsing - and name/type analysis, if applicable - is done only once.

Plausible example: a graphing program, which has to repeatedly evaluate a function supplied by the user to plot it. All the interpreters included in the L₃ compiler are also tree-based.

Virtual machines

Virtual machines

Virtual machines resemble real processors, but are implemented in software. They accept as input a program composed of a sequence of instructions.

Virtual machines often provide more than the simple interpretation of programs: they also abstract the underlying system by managing memory, threads, and sometimes I/O.

Perhaps surprisingly, virtual machines are a very old concept, dating back to ~1950.

They have been - and still are - used in the implementation of many important languages, like SmallTalk, Lisp, Forth, Pascal, and more recently Java and C#.

Why virtual machines?

Since the compiler has to generate code for some machine, why prefer a virtual over a real one?

- for portability: compiled VM code can be run on many actual machines,
- for simplicity: a VM is usually more high-level than a real machine, which simplifies the task of the compiler,
- for simplicity (2): a VM is easier to monitor and profile, which eases debugging.

Virtual machines drawbacks

The only drawback of virtual machines compared to real ones is that the former tend to be slower than the latter.

This is due to the overhead associated with interpretation: fetching and decoding instructions, executing them, etc.

Moreover, the high number of indirect jumps in interpreters causes pipeline stalls in modern processors.

To a (sometimes large) degree, this is mitigated by the tendency of modern VMs to compile the program being executed, and to perform optimizations based on its behavior.

Kinds of virtual machines

There are two kinds of virtual machines:

- **stack-based VMs**, which use a stack to store intermediate results, variables, etc.
- **register-based VMs**, which use a limited set of registers for that purpose, like a real CPU.

For a compiler writer, it is usually easier to target a stack-based VM than a register-based VM, as the complex task of register allocation can be avoided.

Most widely-used virtual machines today are stack-based (e.g. the JVM, .NET's CLR, etc.) but a few recent ones are register-based (e.g. Lua 5.0, Parrot, etc.).

Virtual machine input

Virtual machines take as input a program expressed as a sequence of instructions.

Each instruction is identified by its **opcode** (**operation code**), a simple number. Often, opcodes occupy one byte, hence the name **byte code**.

Some instructions have additional arguments, which appear after the opcode in the instruction stream.

VM implementation

Virtual machines are implemented in much the same way as a real processor:

- the next instruction to execute is fetched from memory and decoded,
- the operands are fetched, the result computed, and the state updated,
- the process is repeated.

VM implementation

Many VMs today are written in C or C++, because these languages are at the right abstraction level for the task, fast and relatively portable.

As we will see later, the Gnu C compiler (GCC) has an extension that makes it possible to use labels as normal values. This extension can be used to write very efficient VMs, and for that reason, several of them are written specifically for GCC.

Implementing a VM in C

```
typedef enum {
    add, /* ... */
} instruction_t;

void interpret() {
    static instruction_t program[] = { add /* ... */ };
    instruction_t* pc = program;
    int* sp = ...; /* stack pointer */
    for (;;) {
        switch (*pc++) {
            case add:
                sp[1] += sp[0];
                sp++;
                break;
            /* ... other instructions */
        }
    }
}
```

Optimizing VMs

The basic, switch-based implementation of a virtual machine just presented can be made faster using several techniques:

- threaded code,
- top of stack caching,
- super-instructions,
- JIT compilation.

Threaded code

Threaded code

In a `switch`-based interpreter, each instruction requires two jumps:

- one indirect jump to the branch handling the current instruction,
- one direct jump from there to the main loop.

It would be better to avoid the second one, by jumping directly to the code handling the next instruction. This is called **threaded code**.

Switch vs. threaded code

Program: add sub mul

switch-based

main loop

add

sub

mul

Threaded

main

add

sub

mul

Switch vs. threaded code

Program: add sub mul



Switch vs. threaded code

Program: add sub mul




Switch vs. threaded code

Program: add sub mul




Switch vs. threaded code

Program: add sub mul

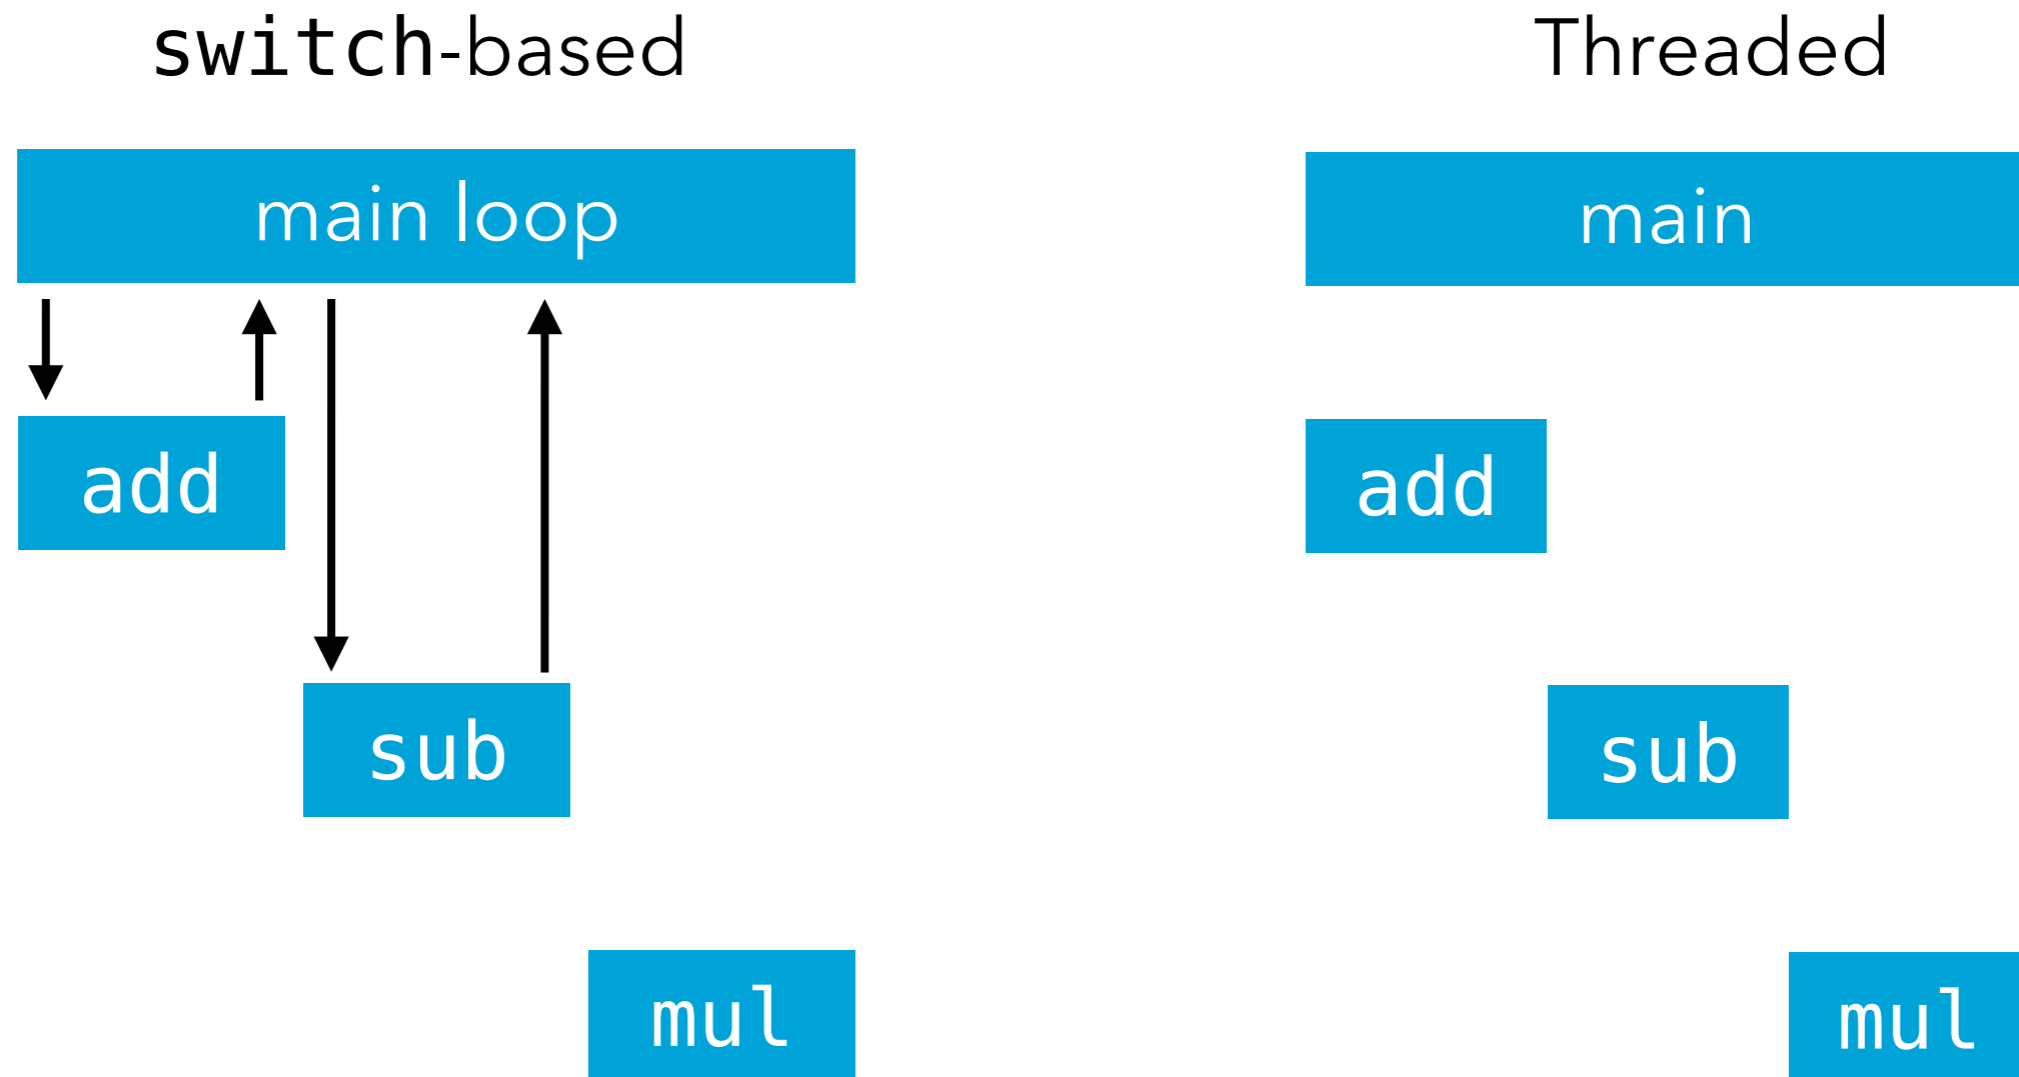


Switch vs. threaded code

Program: add sub mul

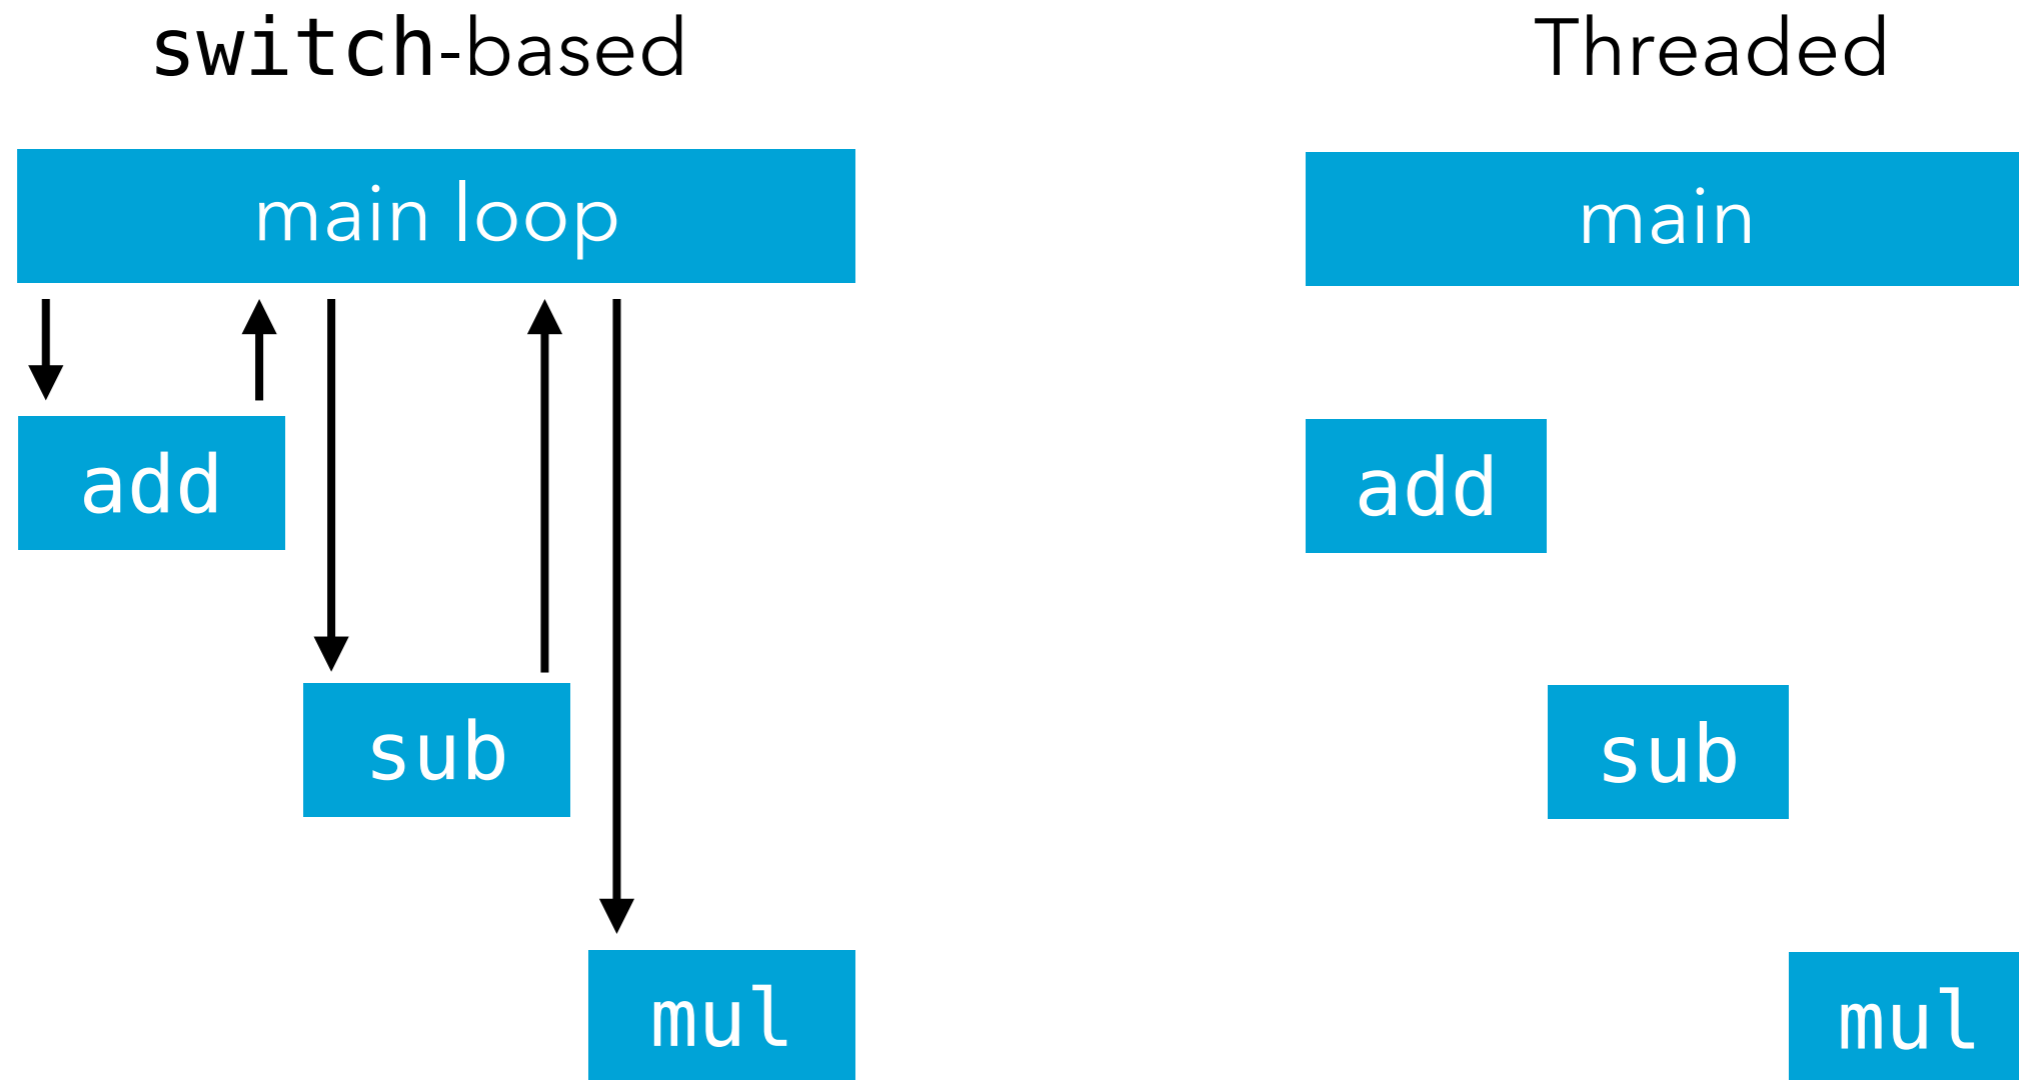

Switch vs. threaded code


Program: add sub mul

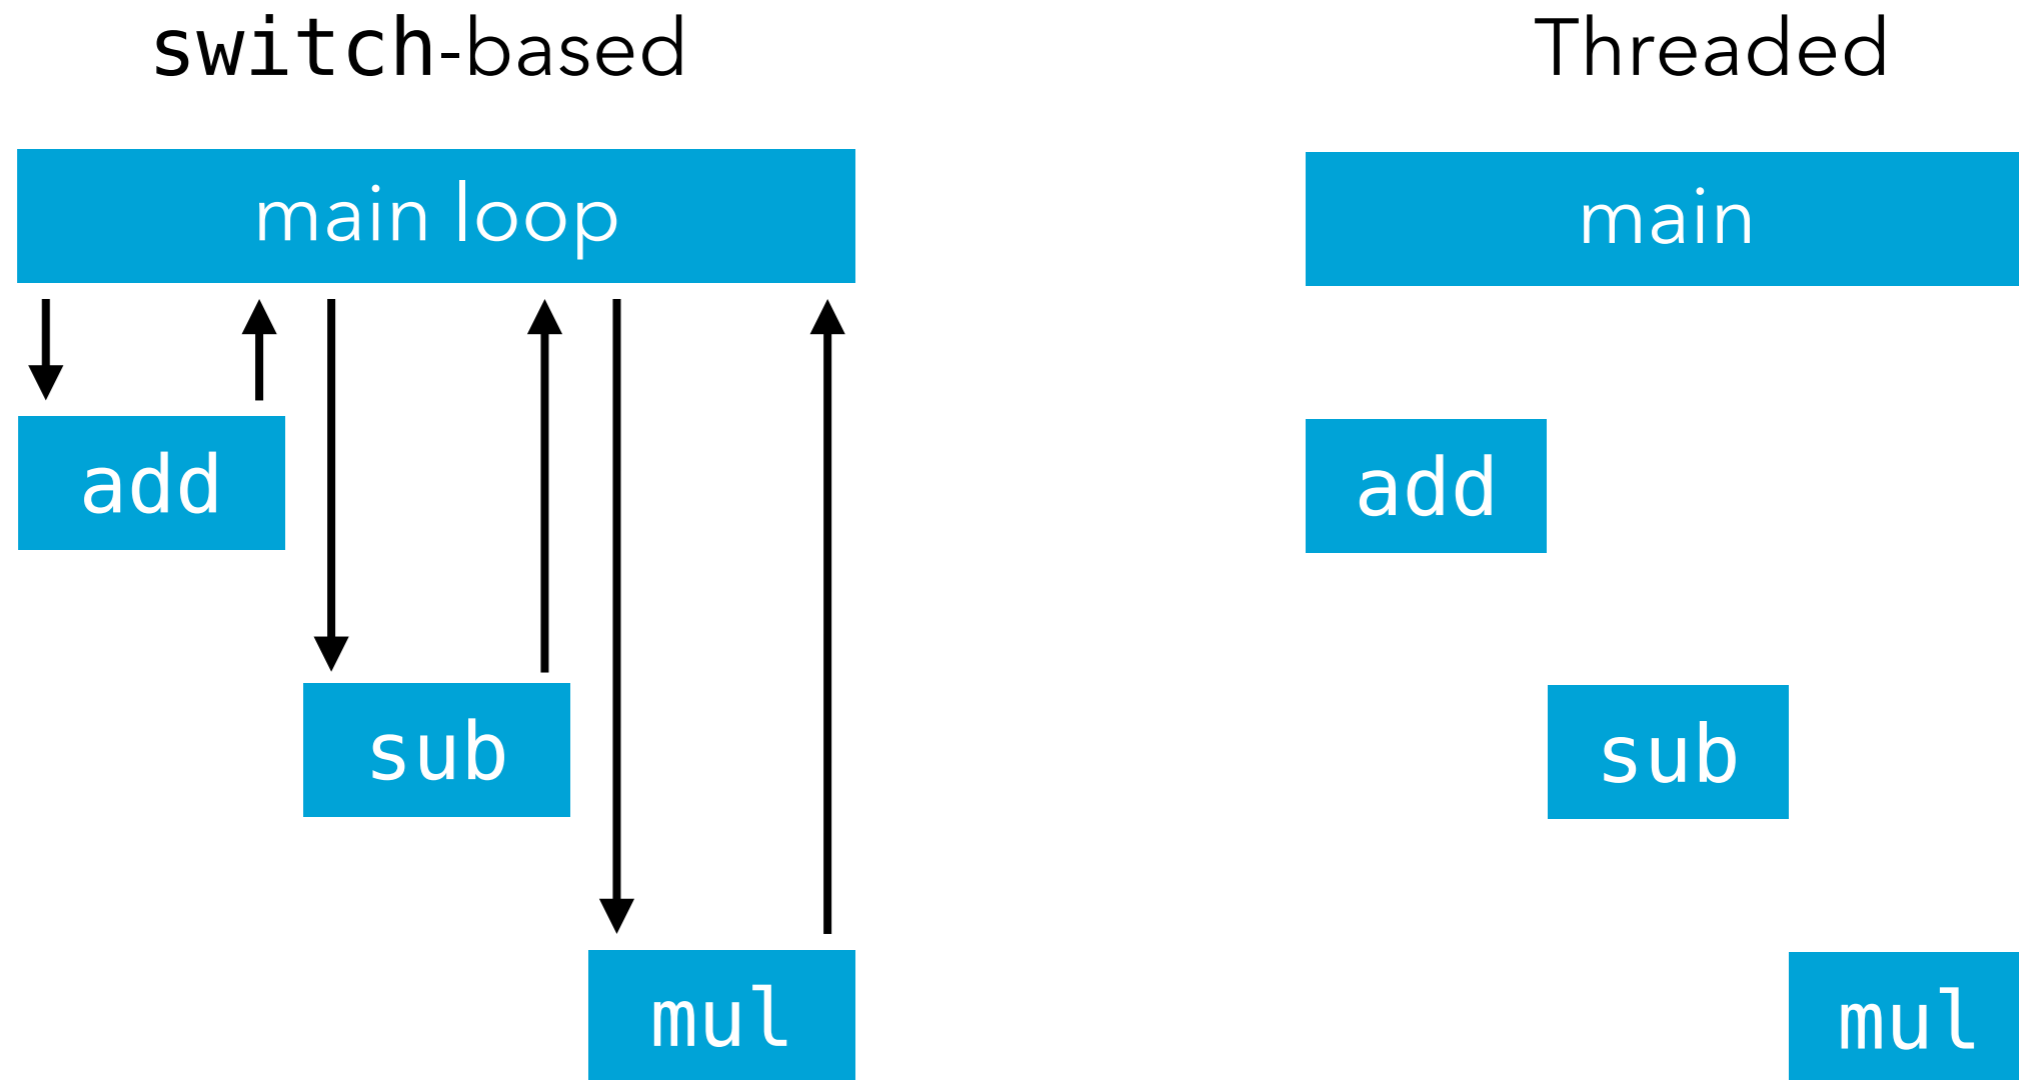


Switch vs. threaded code

Program: add sub mul

switch-based

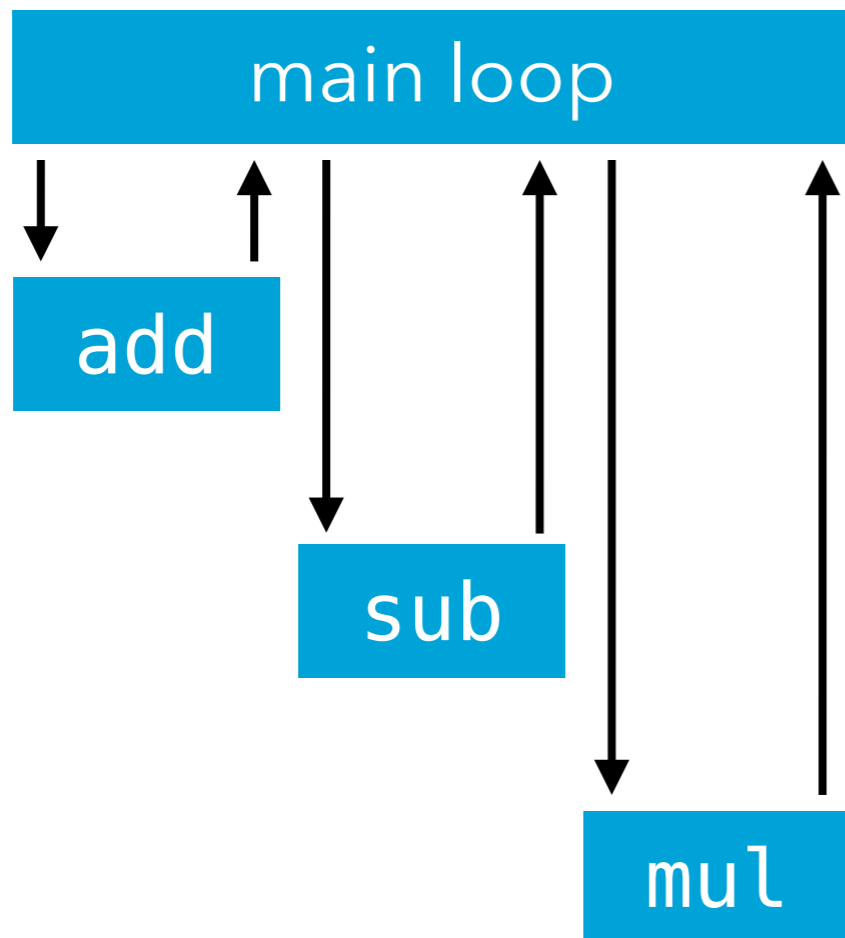


Threaded

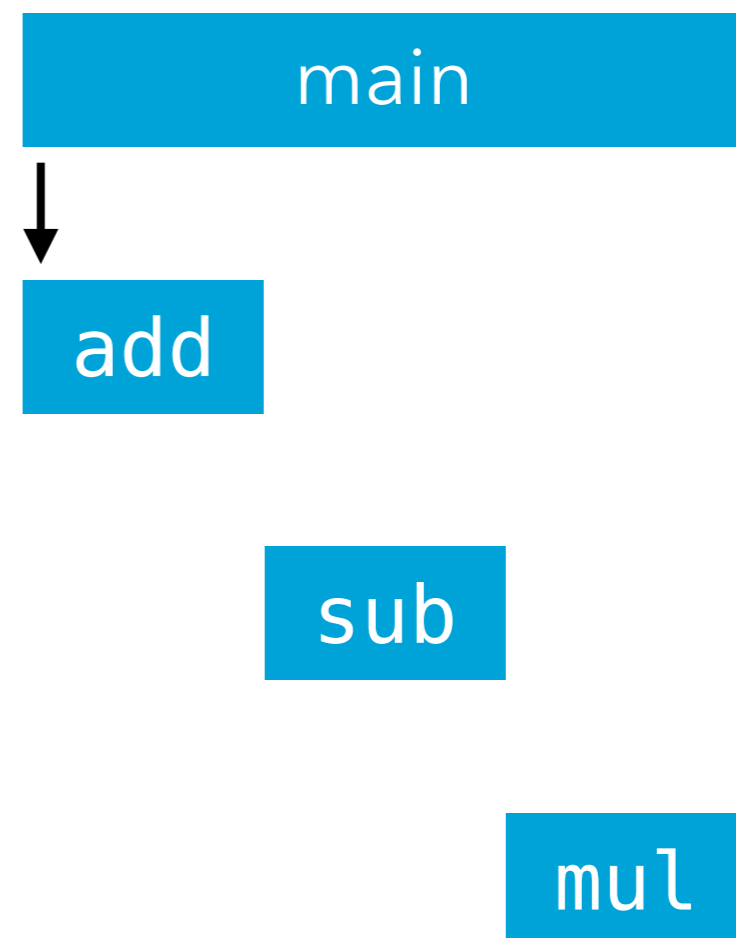


Switch vs. threaded code

Program: add sub mul

switch-based

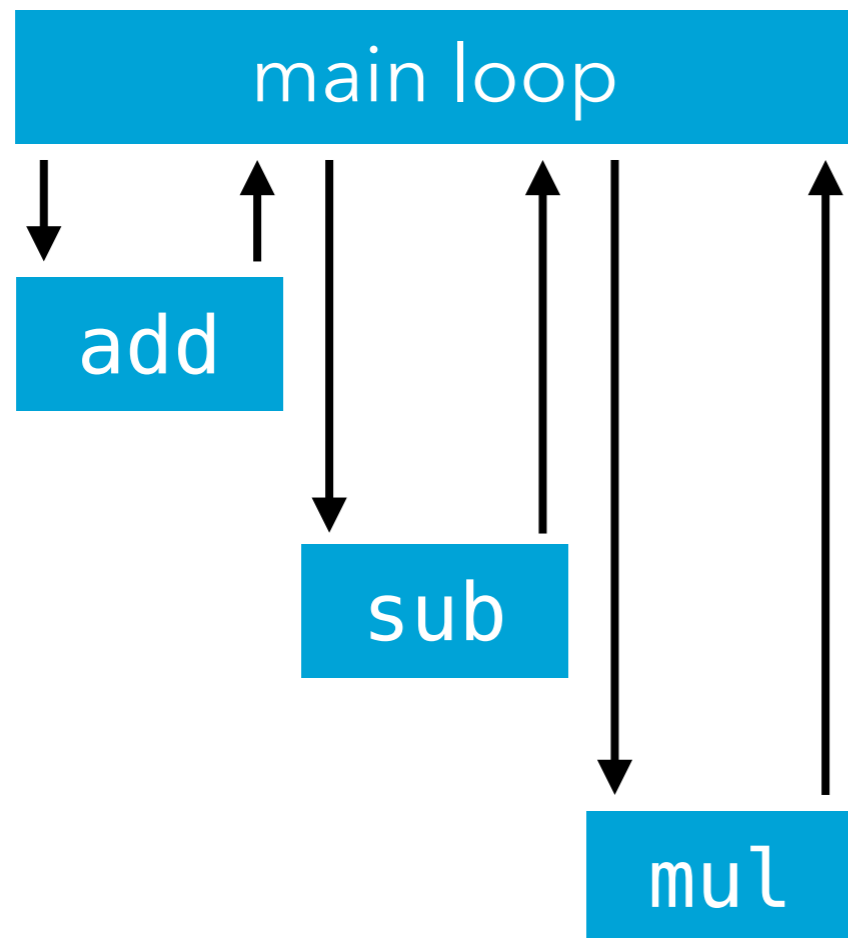


Threaded

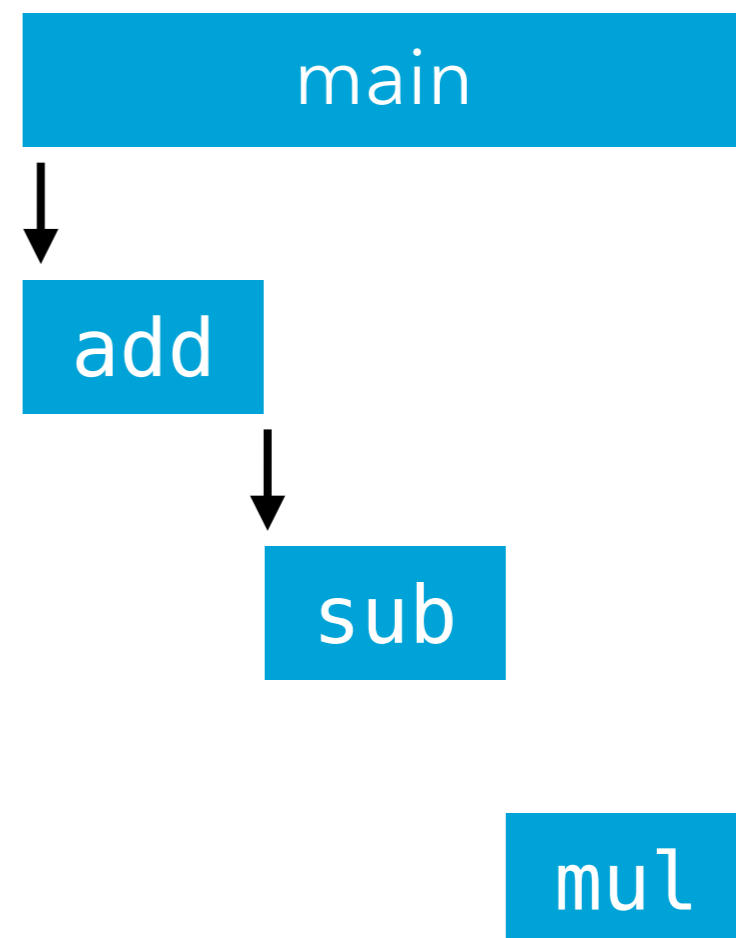


Switch vs. threaded code

Program: add sub mul

switch-based

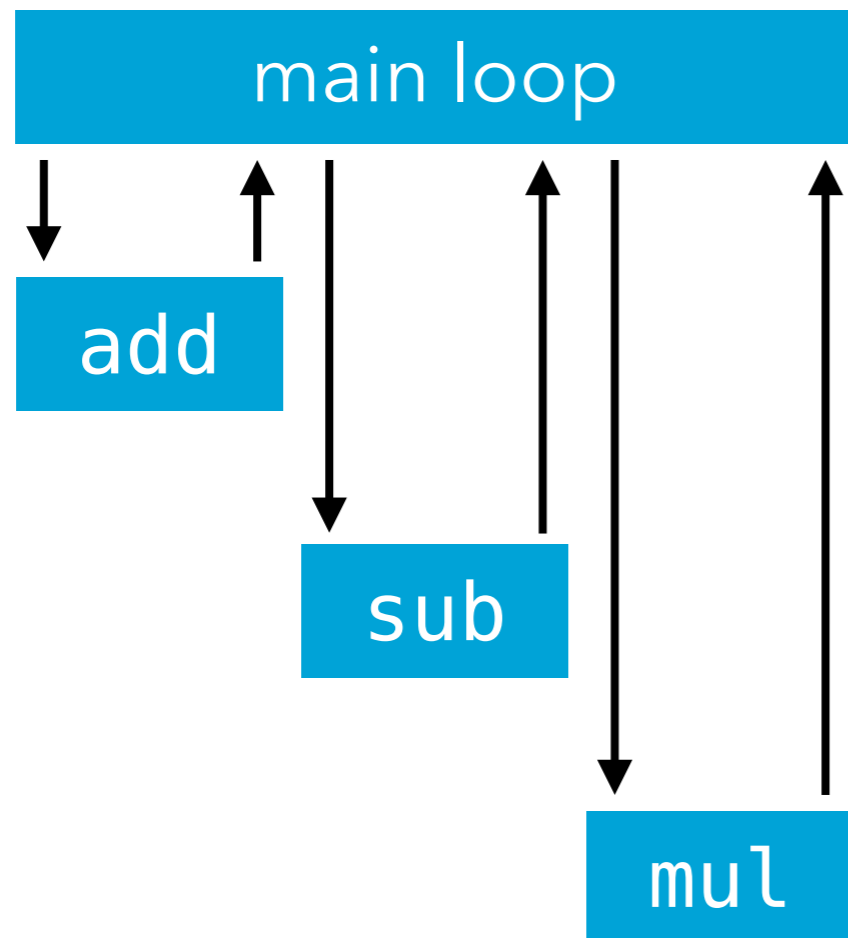

Threaded

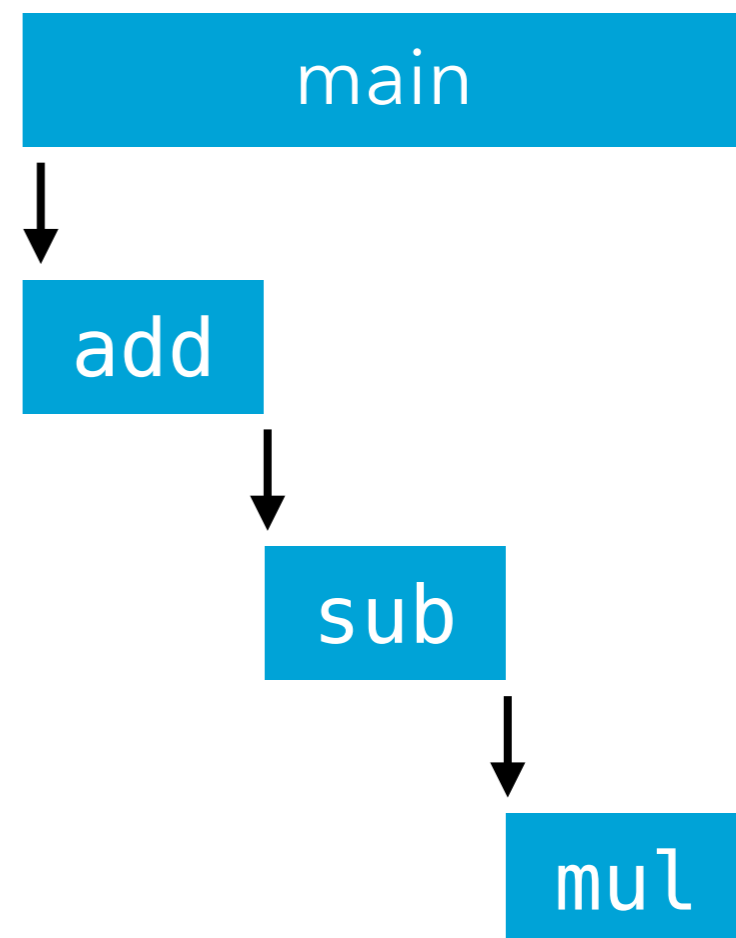

Implementing threaded code

To implement threaded code, there are two main techniques:

- with **indirect threading**, instructions index an array containing pointers to the code handling them,
- with **direct threading**, instructions are pointers to the code handling them.

Direct threading could potentially be faster than indirect threading – because of the lack of indirection – but on modern 64-bit architectures, representing each opcode by a 64-bit pointer is expensive.

Threaded code in C

To implement threaded code, it must be possible to manipulate code pointers. How can this be achieved in C? In ANSI C, the only way to do this is to use function pointers. But GCC allows the manipulation of labels as values, which is much more efficient!

Direct threading in ANSI C

Implementing direct threading in ANSI C is easy, but unfortunately very inefficient!

The idea is to define one function per VM instruction. The program can then simply be represented as an array of function pointers. Some code is inserted at the end of every function, to call the function handling the next VM instruction.

Direct threading in ANSI C

```
typedef void (*instruction_t)();  
static instruction_t* pc;  
static int* sp = ...;  
  
static void add() {  
    sp[1] += sp[0];  
    ++sp;  
    (*++pc)(); /* handle next instruction */  
}  
  
/* ... other instructions */  
  
static instruction_t program[] = { add, /* ... */ };  
  
void interpret() {  
    sp = ...;  
    pc = program;  
    (*pc)(); /* handle first instruction */  
}
```

Direct threading in ANSI C

This implementation of direct threading in ANSI C has a major problem: it leads to stack overflow very quickly, unless the compiler implements tail call elimination.

In our interpreter, the function call appearing at the end of `add` - and all other functions implementing VM instructions - is a tail call and should be optimized.

While recent versions of GCC do full tail call elimination, other compilers do not. With such compilers, the only option is to eliminate tail calls by hand, e.g. using trampolines.

Direct threading with GCC

The Gnu C compiler (GCC) offers an extension that is very useful to implement direct threading: labels can be treated as values, and a goto can jump to a computed label.

With this extension, the program can be represented as an array of labels, and jumping to the next instruction is achieved by a goto to the label currently referred to by the program counter.

Direct threading with GCC

label-as-value

```
void interpret() {
    void* program[] = { &&l_add, /* ... */ };

    int* sp = ...;
    void** pc = program;
    goto **pc; /* jump to first instruction */

l_add:
    sp[1] += sp[0];
    ++sp;
    goto **(++pc); /* jump to next instruction */


    /* ... other instructions */
}
```

computed
goto

Threading benchmark

The benchmark below compares several versions of a small interpreter measured while interpreting 500'000'000 iterations of a simple loop. The code was compiled using LLVM-GCC v4.2.1 with full optimizations, and run on an Intel Core i5.

The normalized times are presented below.

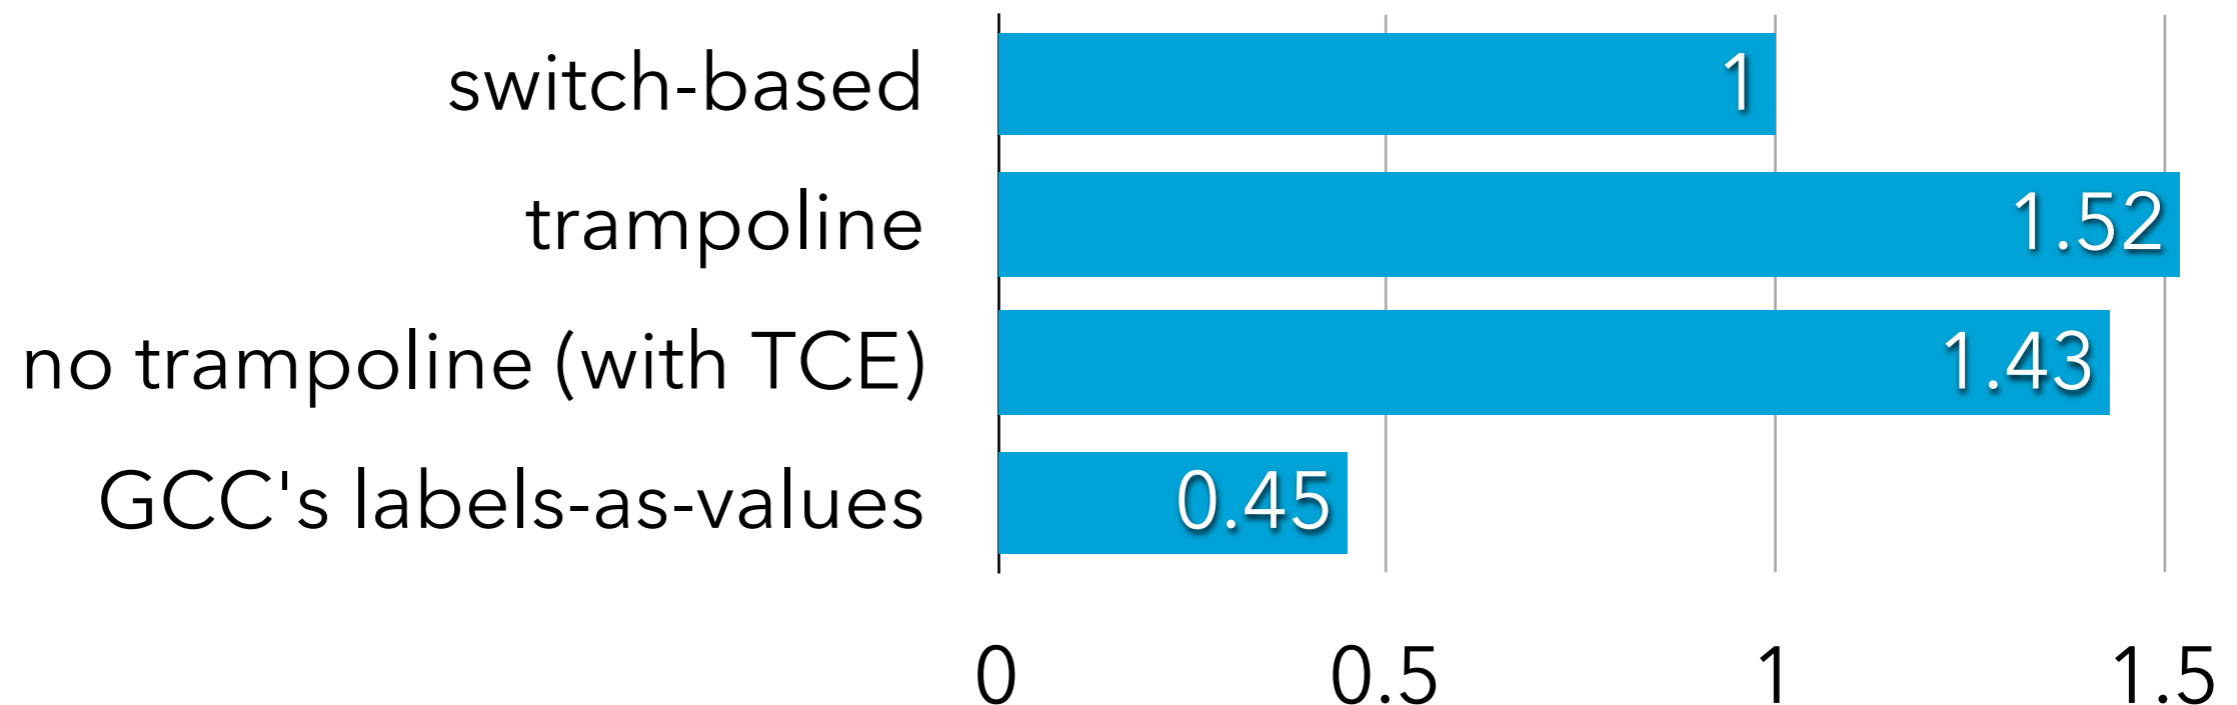


Top-of-stack caching

Top-of-stack caching

In a stack-based VM, the stack is typically represented as an array in memory. Since almost all instructions access the stack, it can be interesting to store some of its topmost elements in registers.


However, keeping a *fixed* number of stack elements in registers is usually a bad idea, as the following example illustrates:

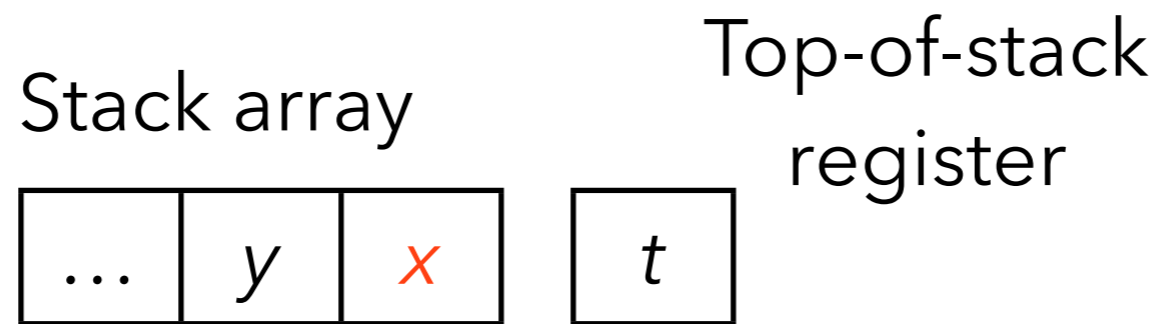

Top-of-stack caching

In a stack-based VM, the stack is typically represented as an array in memory. Since almost all instructions access the stack, it can be interesting to store some of its topmost elements in registers.


However, keeping a *fixed* number of stack elements in registers is usually a bad idea, as the following example illustrates:

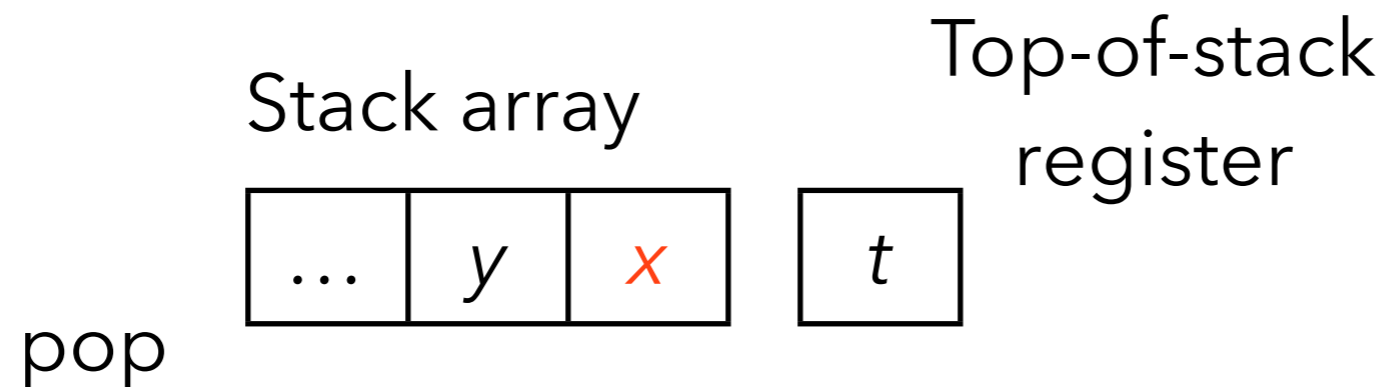

Top-of-stack caching

In a stack-based VM, the stack is typically represented as an array in memory. Since almost all instructions access the stack, it can be interesting to store some of its topmost elements in registers.


However, keeping a *fixed* number of stack elements in registers is usually a bad idea, as the following example illustrates:

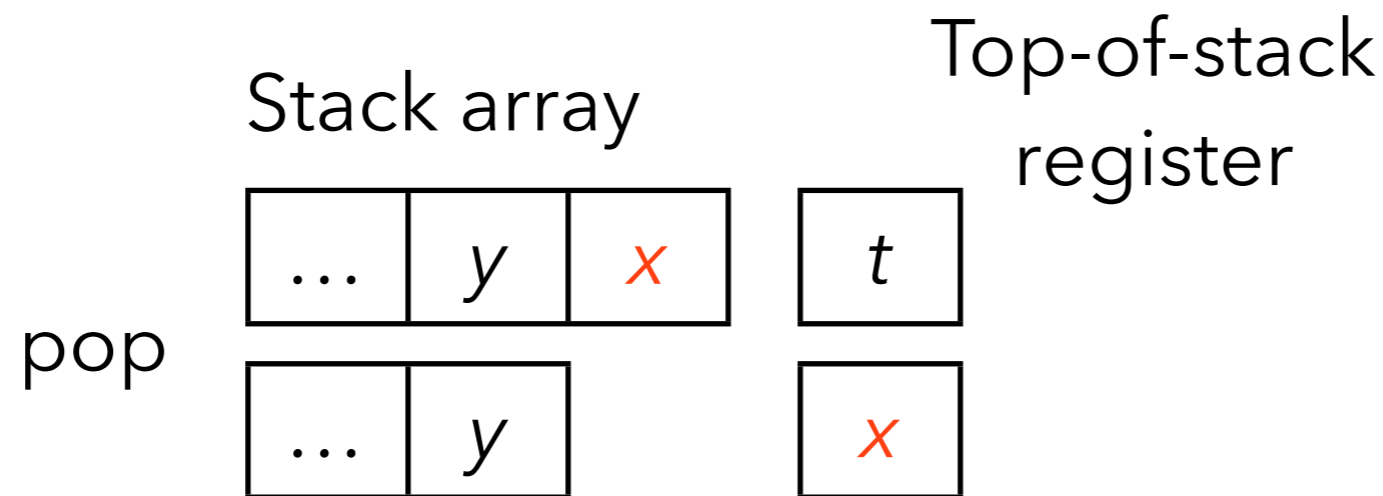

Top-of-stack caching

In a stack-based VM, the stack is typically represented as an array in memory. Since almost all instructions access the stack, it can be interesting to store some of its topmost elements in registers.


However, keeping a *fixed* number of stack elements in registers is usually a bad idea, as the following example illustrates:

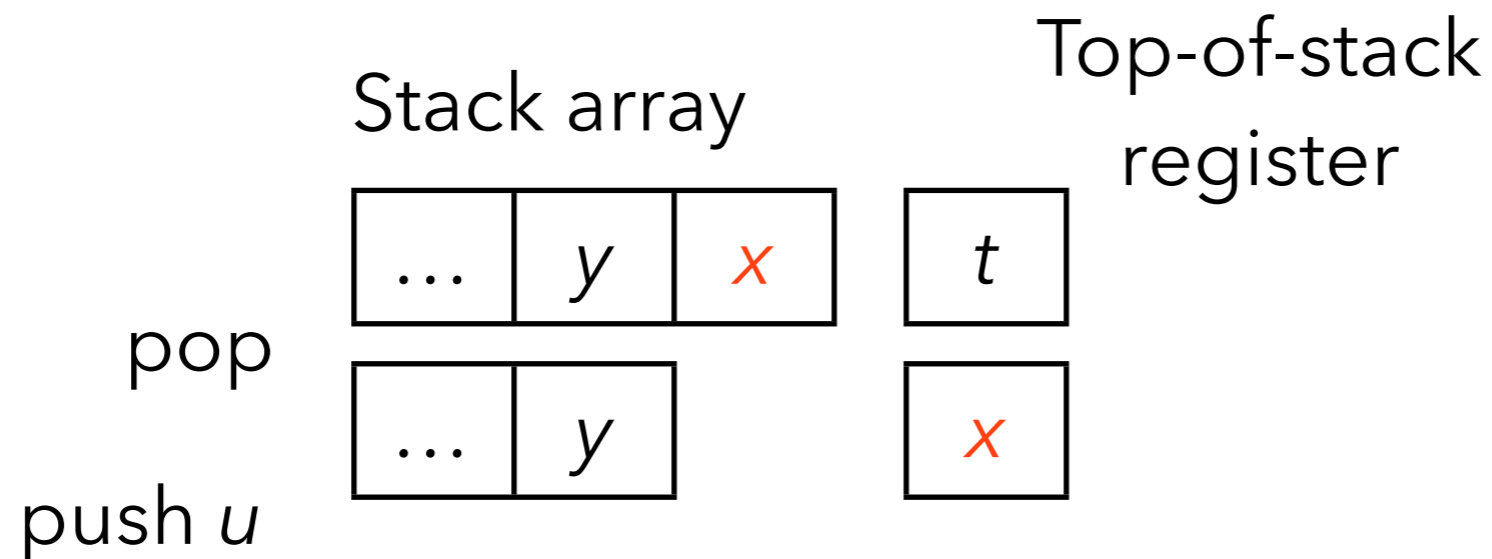

Top-of-stack caching

In a stack-based VM, the stack is typically represented as an array in memory. Since almost all instructions access the stack, it can be interesting to store some of its topmost elements in registers.


However, keeping a *fixed* number of stack elements in registers is usually a bad idea, as the following example illustrates:

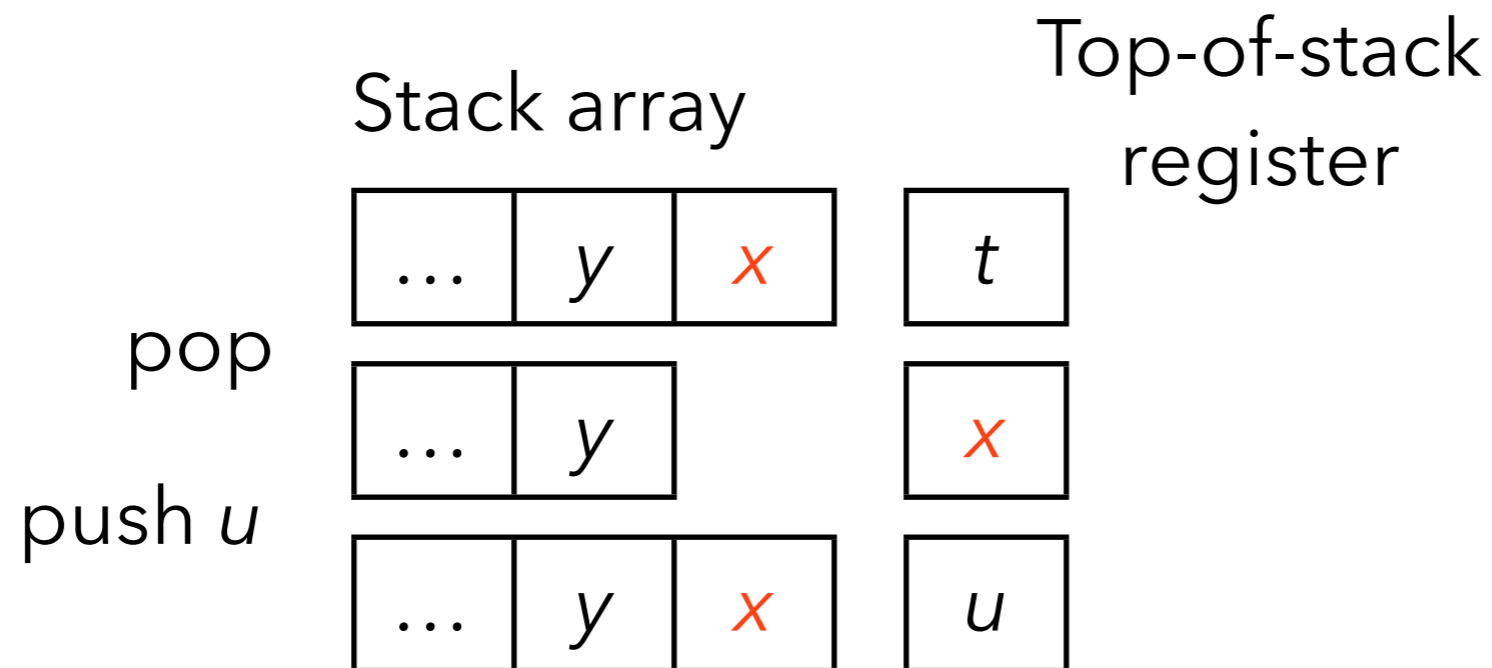

Top-of-stack caching

In a stack-based VM, the stack is typically represented as an array in memory. Since almost all instructions access the stack, it can be interesting to store some of its topmost elements in registers.


However, keeping a *fixed* number of stack elements in registers is usually a bad idea, as the following example illustrates:

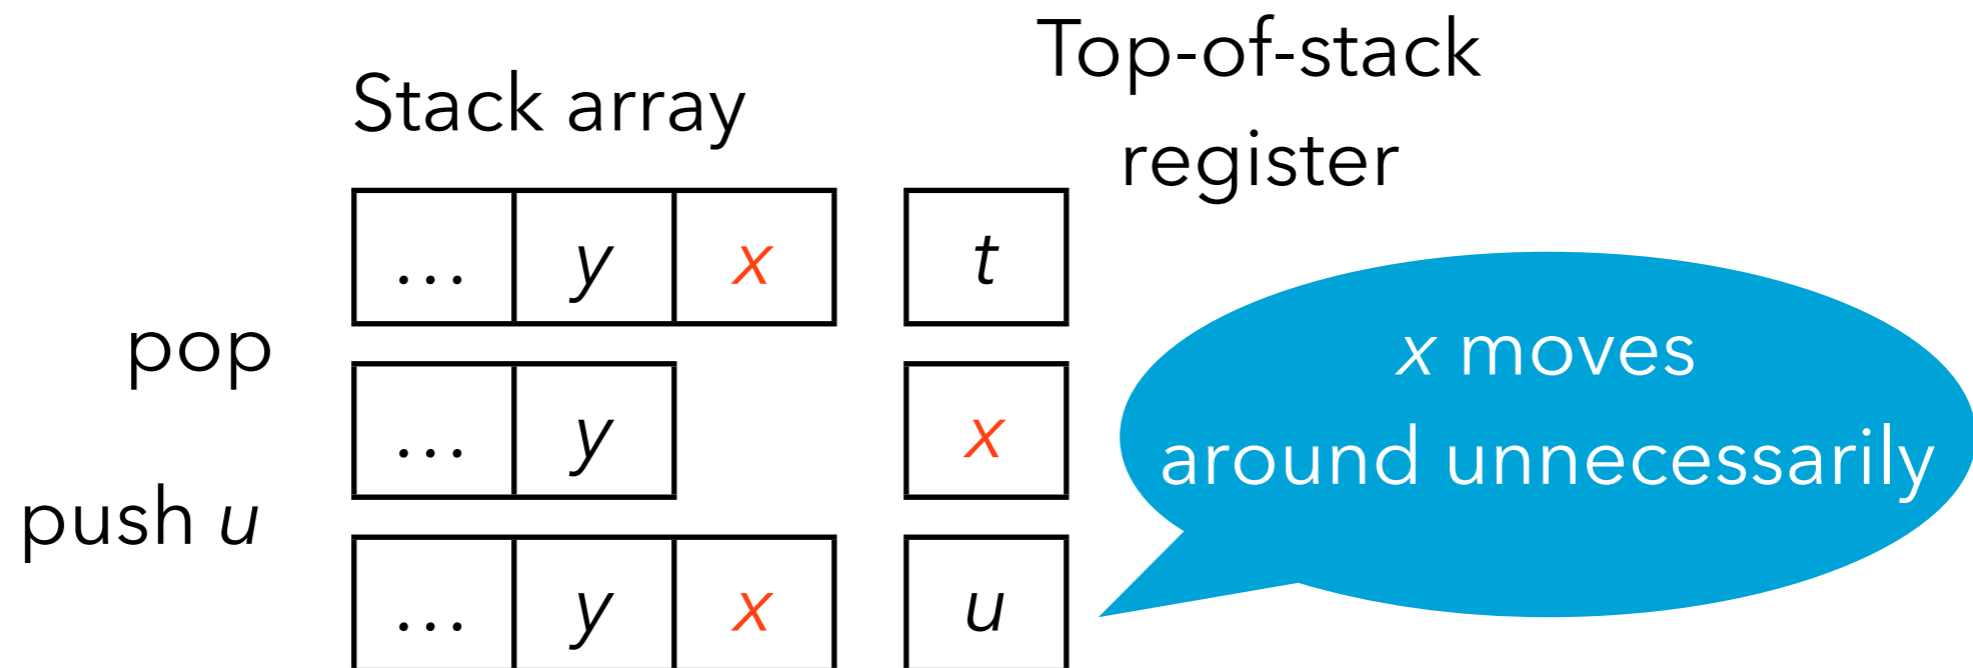

Top-of-stack caching

Since caching a *fixed* number of stack elements in registers seems like a bad idea, it is natural to try to cache a *variable* number of them.


For example, here is what happens when caching *at most one* stack element in a register:

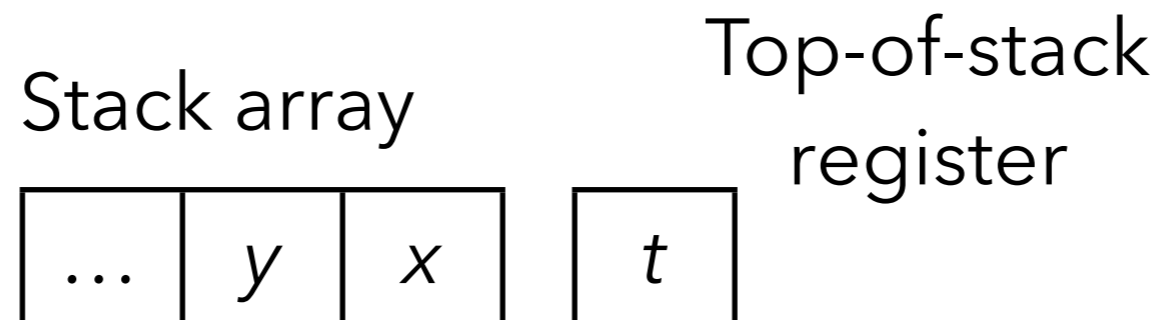

Top-of-stack caching

Since caching a *fixed* number of stack elements in registers seems like a bad idea, it is natural to try to cache a *variable* number of them.


For example, here is what happens when caching *at most one* stack element in a register:

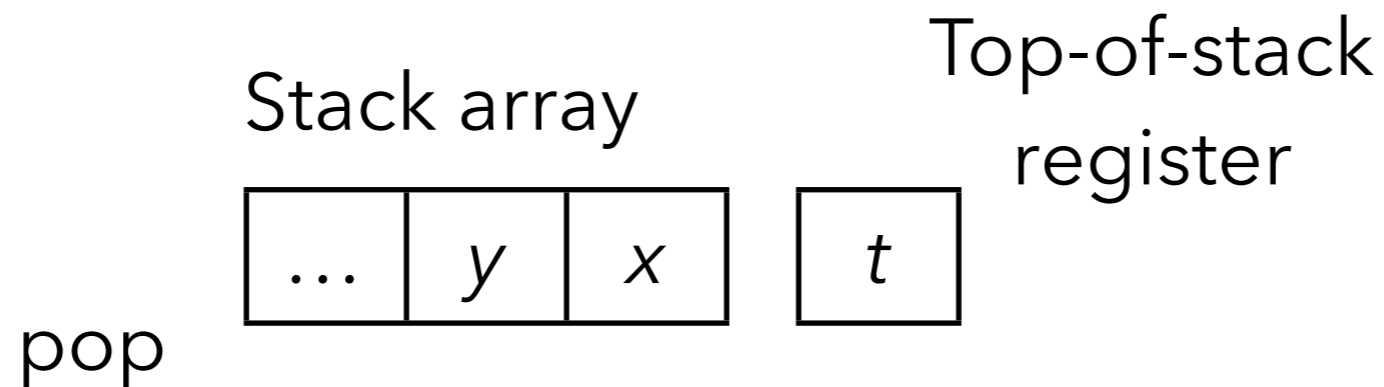

Top-of-stack caching

Since caching a *fixed* number of stack elements in registers seems like a bad idea, it is natural to try to cache a *variable* number of them.


For example, here is what happens when caching *at most one* stack element in a register:

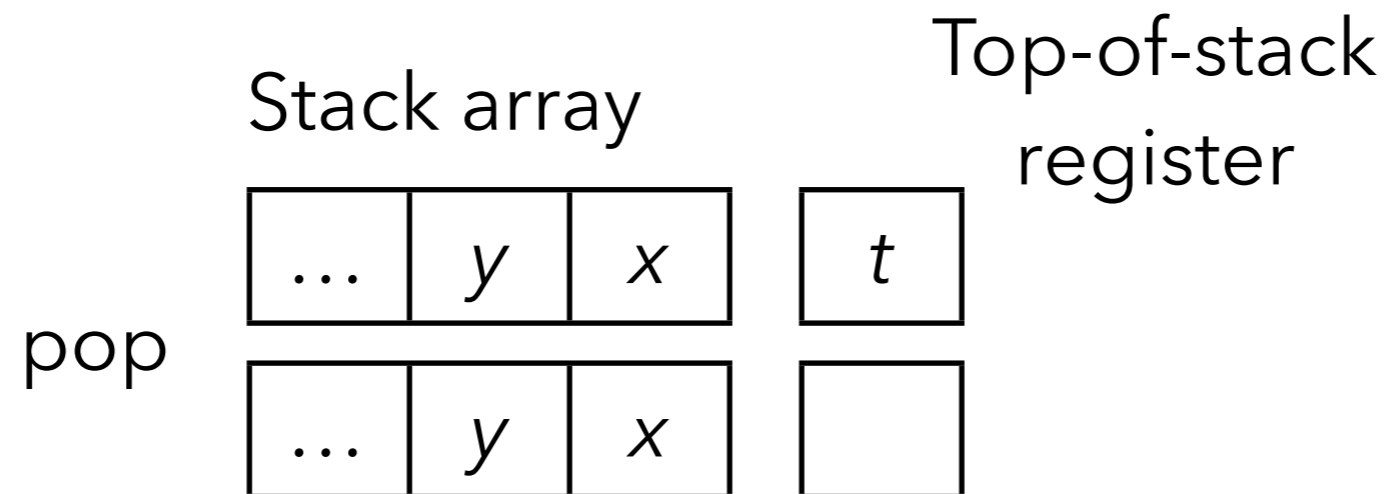

Top-of-stack caching

Since caching a *fixed* number of stack elements in registers seems like a bad idea, it is natural to try to cache a *variable* number of them.


For example, here is what happens when caching *at most one* stack element in a register:

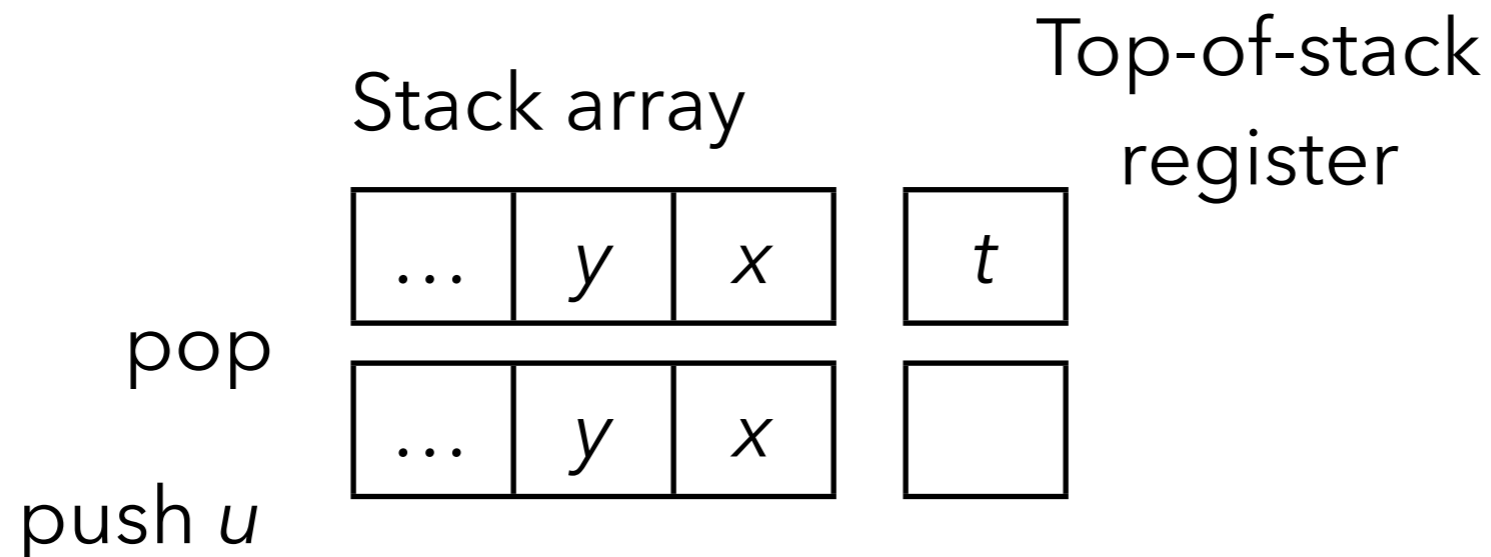

Top-of-stack caching

Since caching a *fixed* number of stack elements in registers seems like a bad idea, it is natural to try to cache a *variable* number of them.


For example, here is what happens when caching *at most one* stack element in a register:

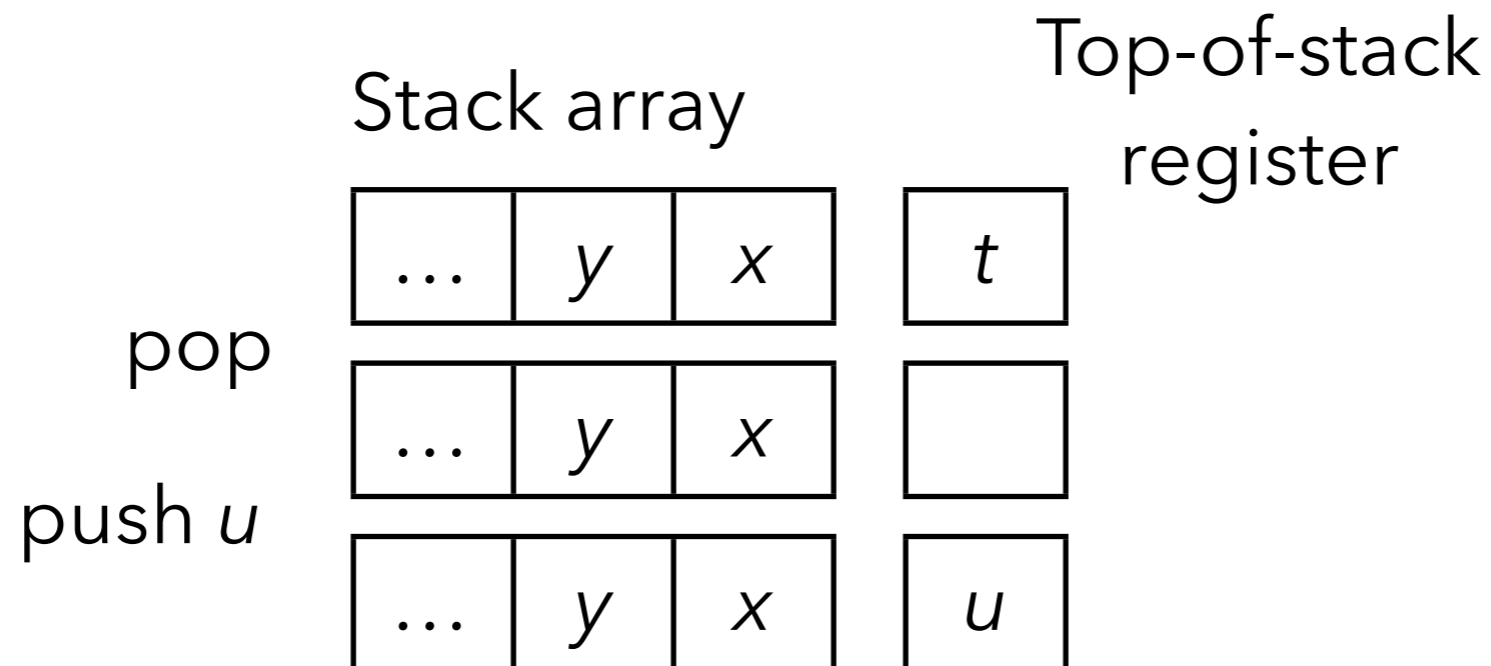

Top-of-stack caching

Since caching a *fixed* number of stack elements in registers seems like a bad idea, it is natural to try to cache a *variable* number of them.

For example, here is what happens when caching *at most one* stack element in a register:

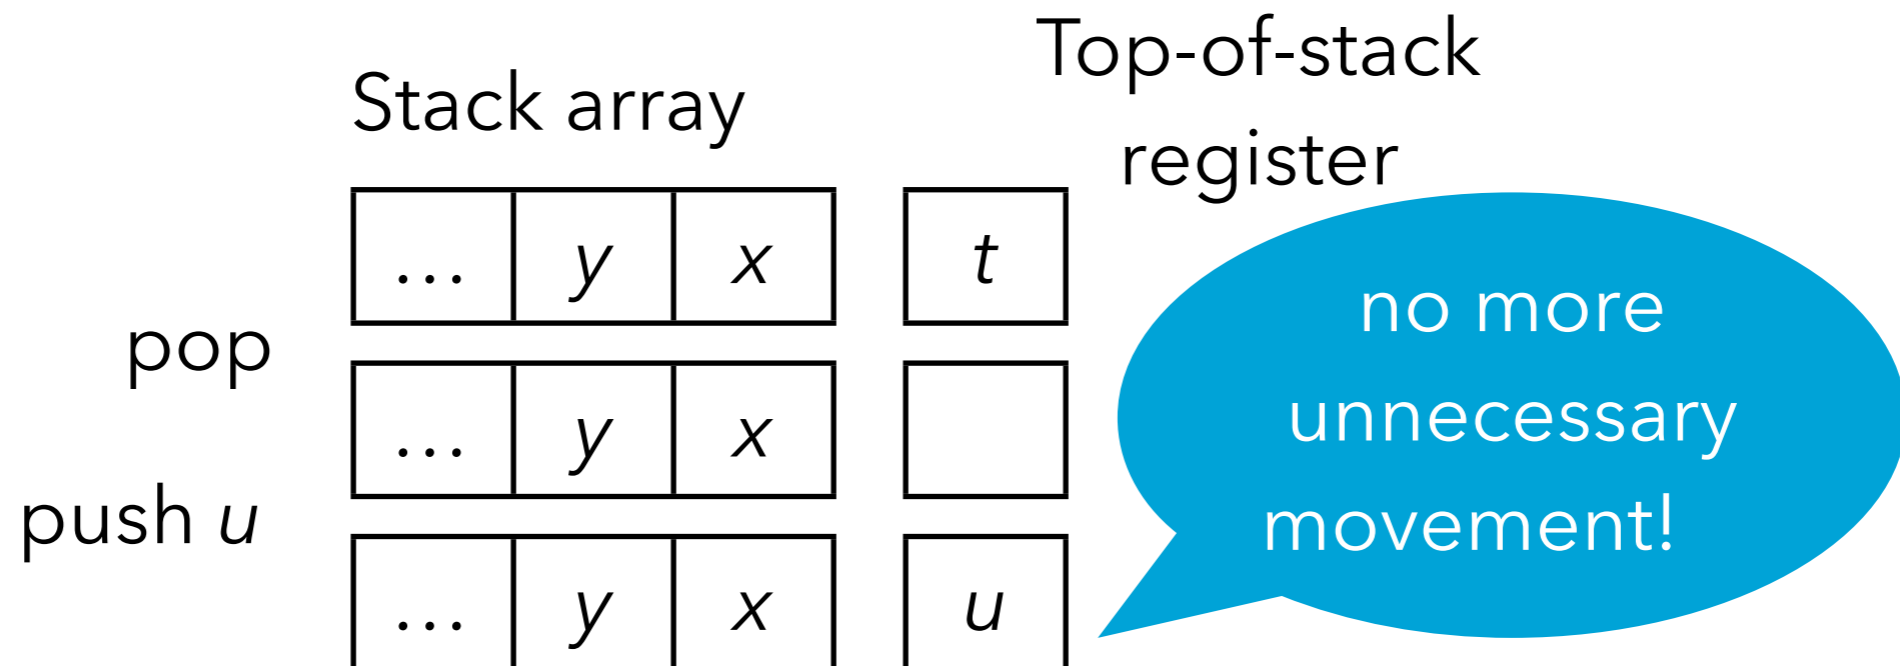

Top-of-stack caching

Caching a variable number of stack elements in registers complicates the implementation of instructions.

There must be one implementation of each VM instruction per **cache state** - defined as the number of stack elements currently cached in registers.

For example, when caching at most one stack element, the **add** instruction needs the following two implementations:

State 0: no elements in reg.


```
add_0:
  tos = sp[0]+sp[1];
  sp += 2;
  // go to state 1
```

State 1: top-of-stack in reg.

```
add_1:
  tos += sp[0];
  sp += 1;
  // stay in state 1
```

Benchmark

The benchmark below compares two versions of a small interpreter measured while interpreting a program summing the first 200'000'000 integers. Both interpreters were compiled with LLVM-GCC 4.2.1 with maximum optimizations, and run on an Intel Core i5. The normalized times are presented below.

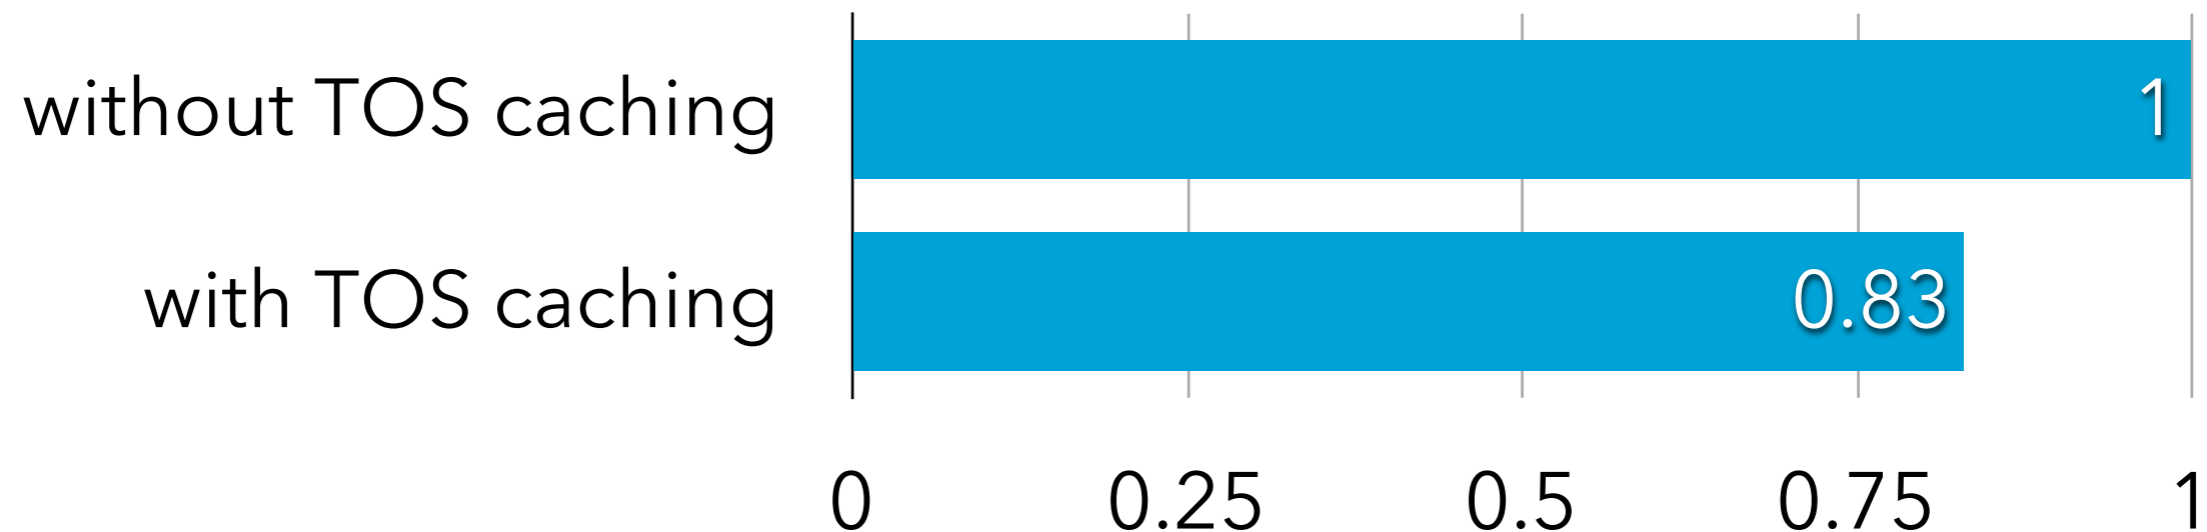

Super-instructions

Static super-instructions

Since instruction dispatch is expensive in a VM, one way to reduce its cost is simply to dispatch less!

This can be done by grouping several instructions that often appear in sequence into a **super-instruction**.

For example, if the `mul` instruction is often followed by the `add` instruction, the two can be combined in a single `madd` (multiply and add) super-instruction.

Profiling is typically used to determine which sequences should be transformed into super-instructions, and the instruction set of the VM is then modified accordingly.

Dynamic super-instructions

It is also possible to generate super-instructions at run time, to adapt them to the program being run. This is the idea behind **dynamic super-instructions**.

This technique can be pushed to its limits, by generating one super-instruction *for every basic block* of the program! This effectively transform all basic blocks into single (super-)instructions.

L₃VM

L₃VM

L₃VM is the virtual machine developed for this course. Its main characteristics are:


- it is 32-bit, in the sense that the basic unit of storage is a 32-bit word – therefore, (untagged) integers and pointers are both 32-bit,
- it is register-based, although its notion of registers is not standard,
- it is relatively simple, with only 31 instructions.

Memory

L₃VM has a 32-bit address space - even when running on a 64-bit machine - which is used to store both code and data.

Code is stored starting at address 0 and the rest of the available memory is used for the heap.

The L₃VM address space is virtual, in that it is not the same as the one of the host architecture.

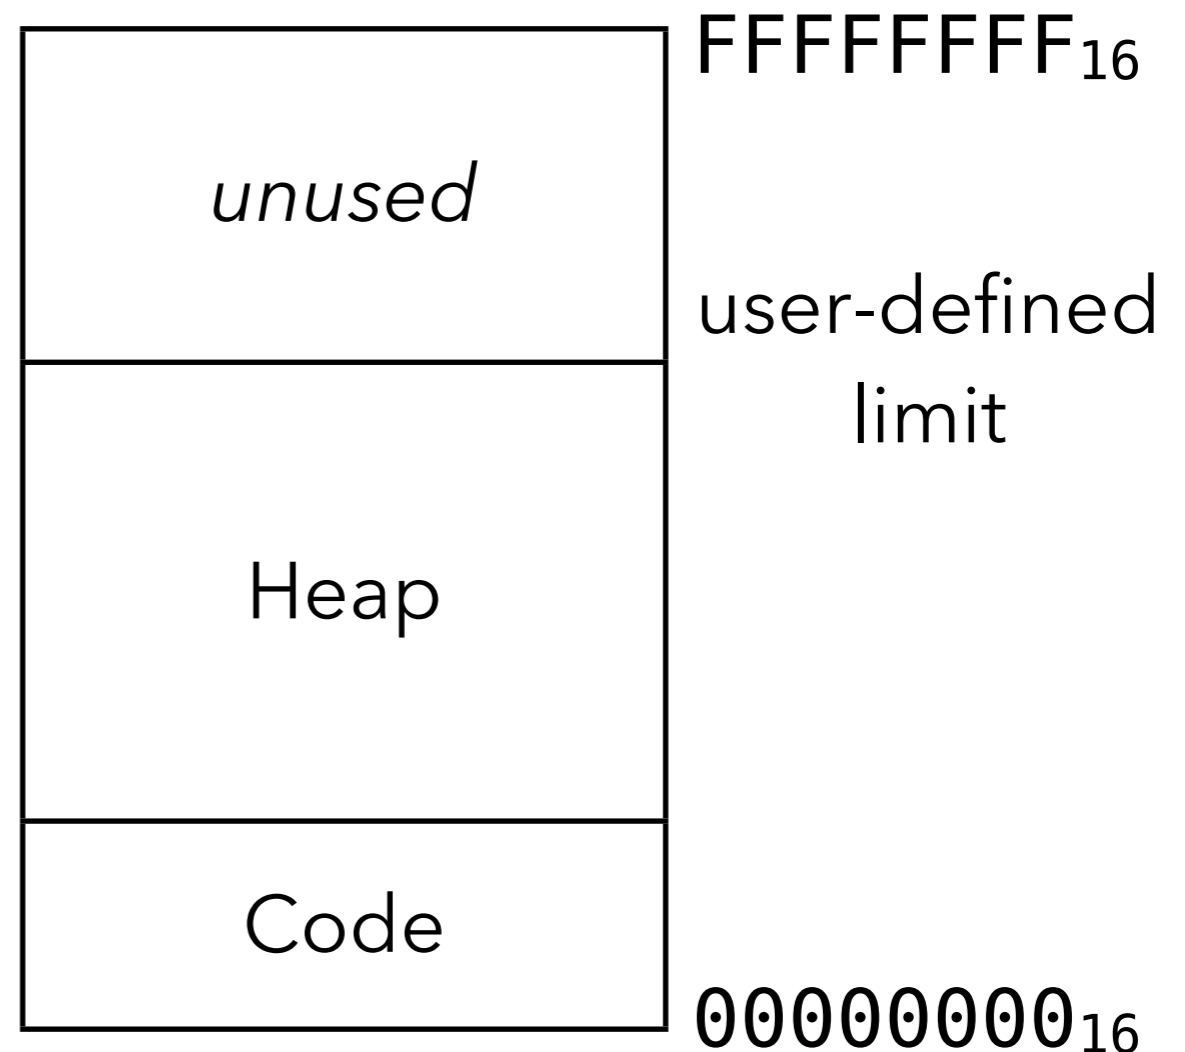

Registers

Strictly speaking, L₃VM has only four registers:

- PC is the program counter, containing the address of the instruction being executed,
- I_b, L_b and O_b are the input, local and output **base registers** (respectively), each of which contains either 0 or the address of a heap-allocated block.

Register slots

The slots of the blocks pointed by \mathbf{I}_b , \mathbf{L}_b and \mathbf{O}_b are reachable through pseudo-registers. For example, the pseudo-register \mathbf{O}_3 designates the slot at index 3 of the block pointed by \mathbf{O}_b .


There are 16 input and output pseudo-registers (\mathbf{I}_0 to \mathbf{I}_{15} and \mathbf{O}_0 to \mathbf{O}_{15}), and 224 local pseudo-registers (\mathbf{L}_0 to \mathbf{L}_{223}). (In the following, we use the term register to designate a pseudo-registers, and base register to designate a base register).

Function call and return

A function gets its arguments through its input registers, stores its local variables in its local registers, and uses its output registers to pass arguments to the functions it calls. The **CALL** instruction takes care of saving the caller's context, composed of its input and local base registers (\mathbf{I}_b and \mathbf{L}_b) as well as its return address. They are saved in the callee's first three input registers (\mathbf{I}_0 to \mathbf{I}_2), and can be seen as implicit arguments passed to the callee. Symmetrically, the **RET** instruction takes care of restoring the caller's context.


Function call example

The following animation illustrates the saving of the caller's context as well as the installation of the callee's context during a function call:

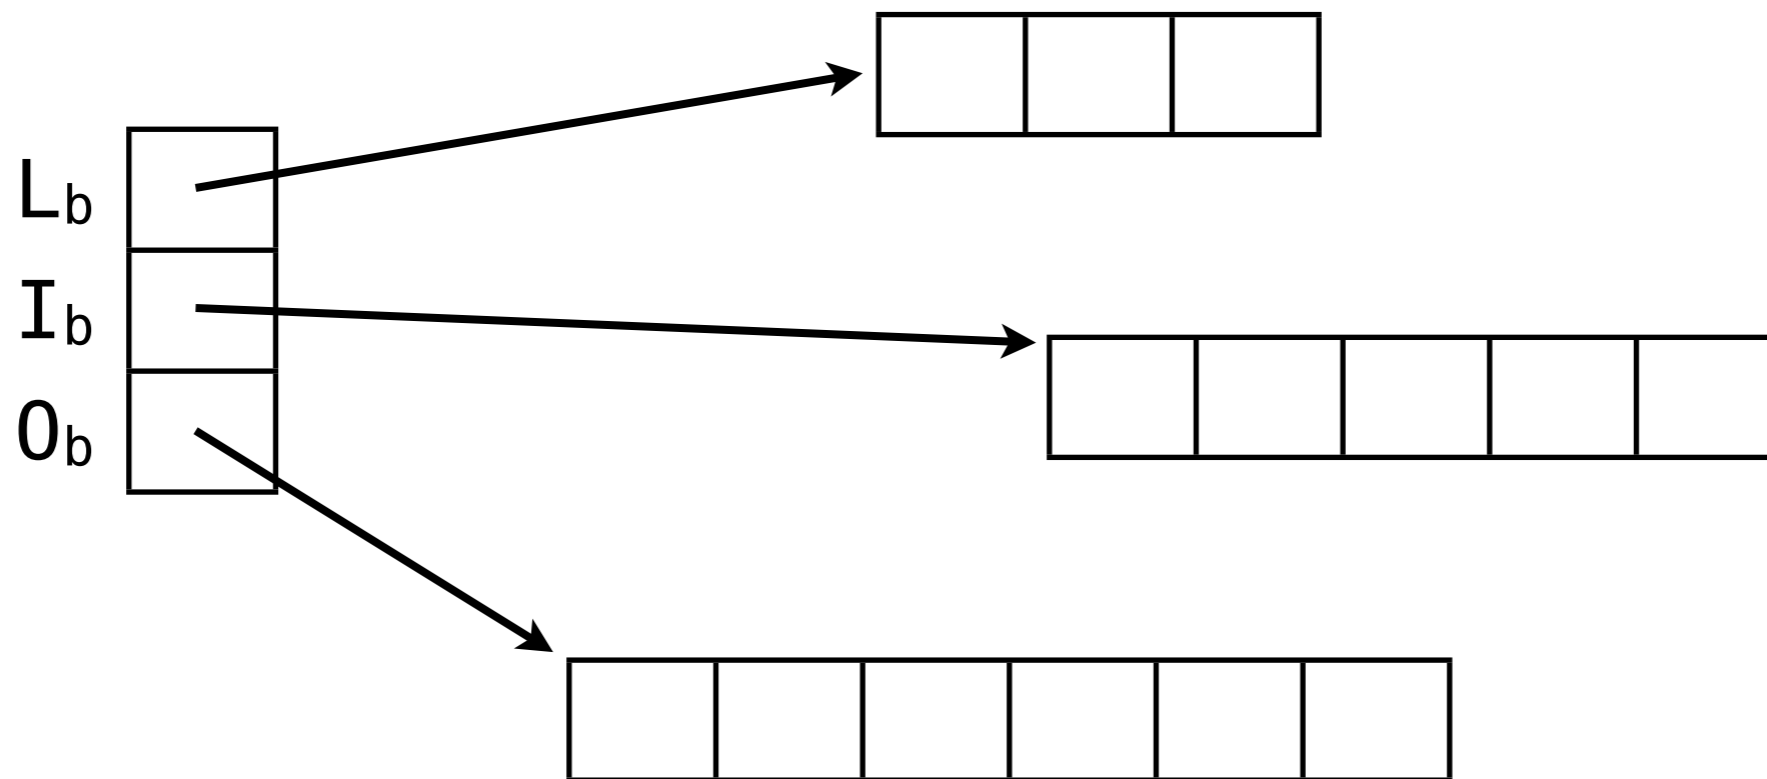


Function call example

The following animation illustrates the saving of the caller's context as well as the installation of the callee's context during a function call:

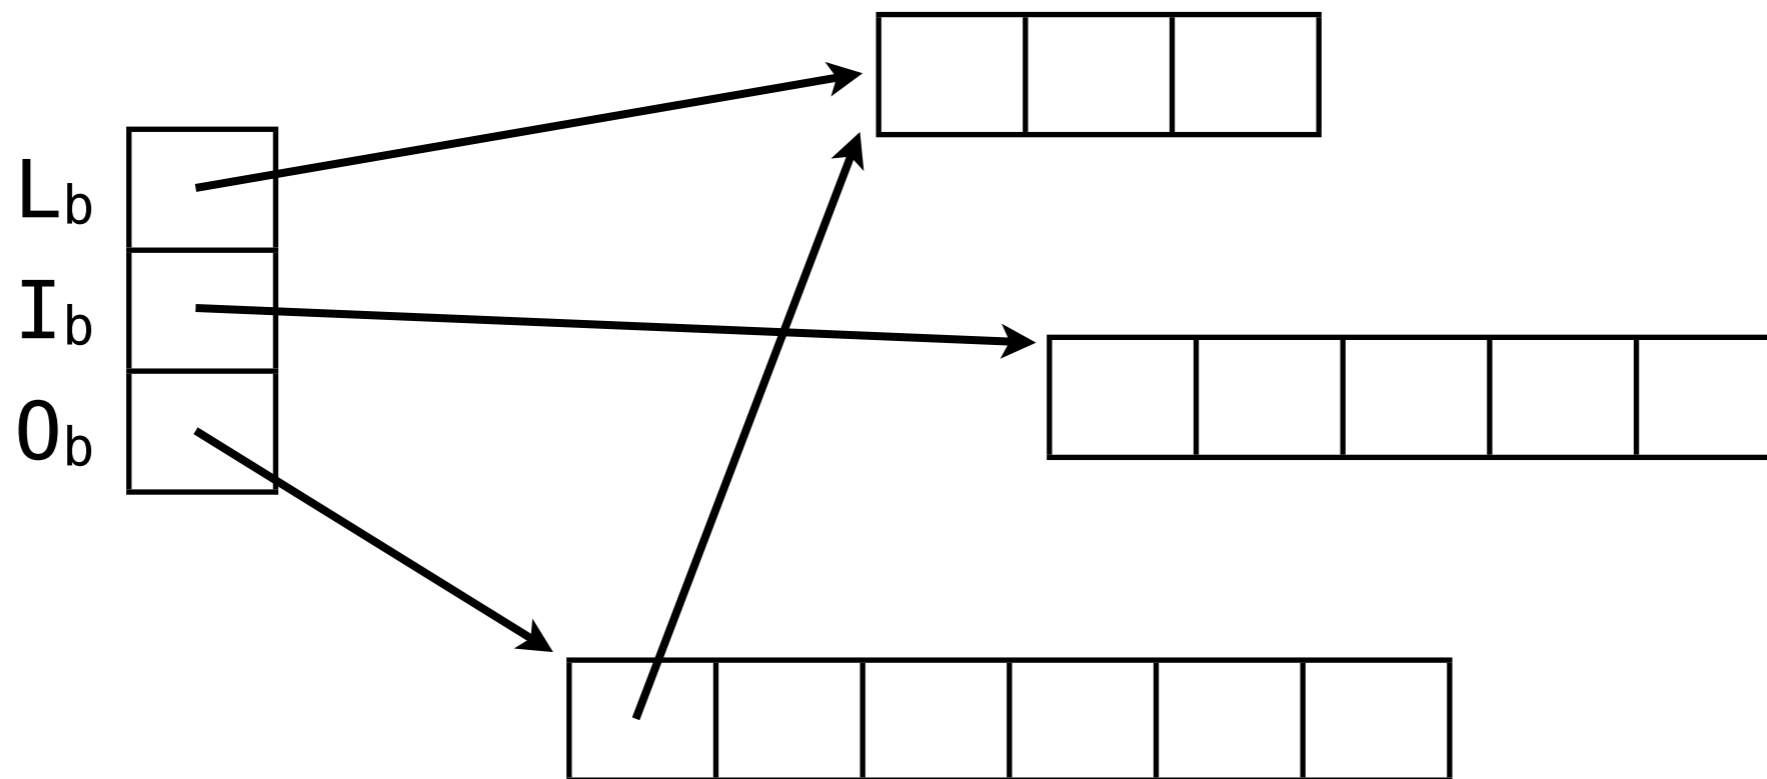


Function call example

The following animation illustrates the saving of the caller's context as well as the installation of the callee's context during a function call:

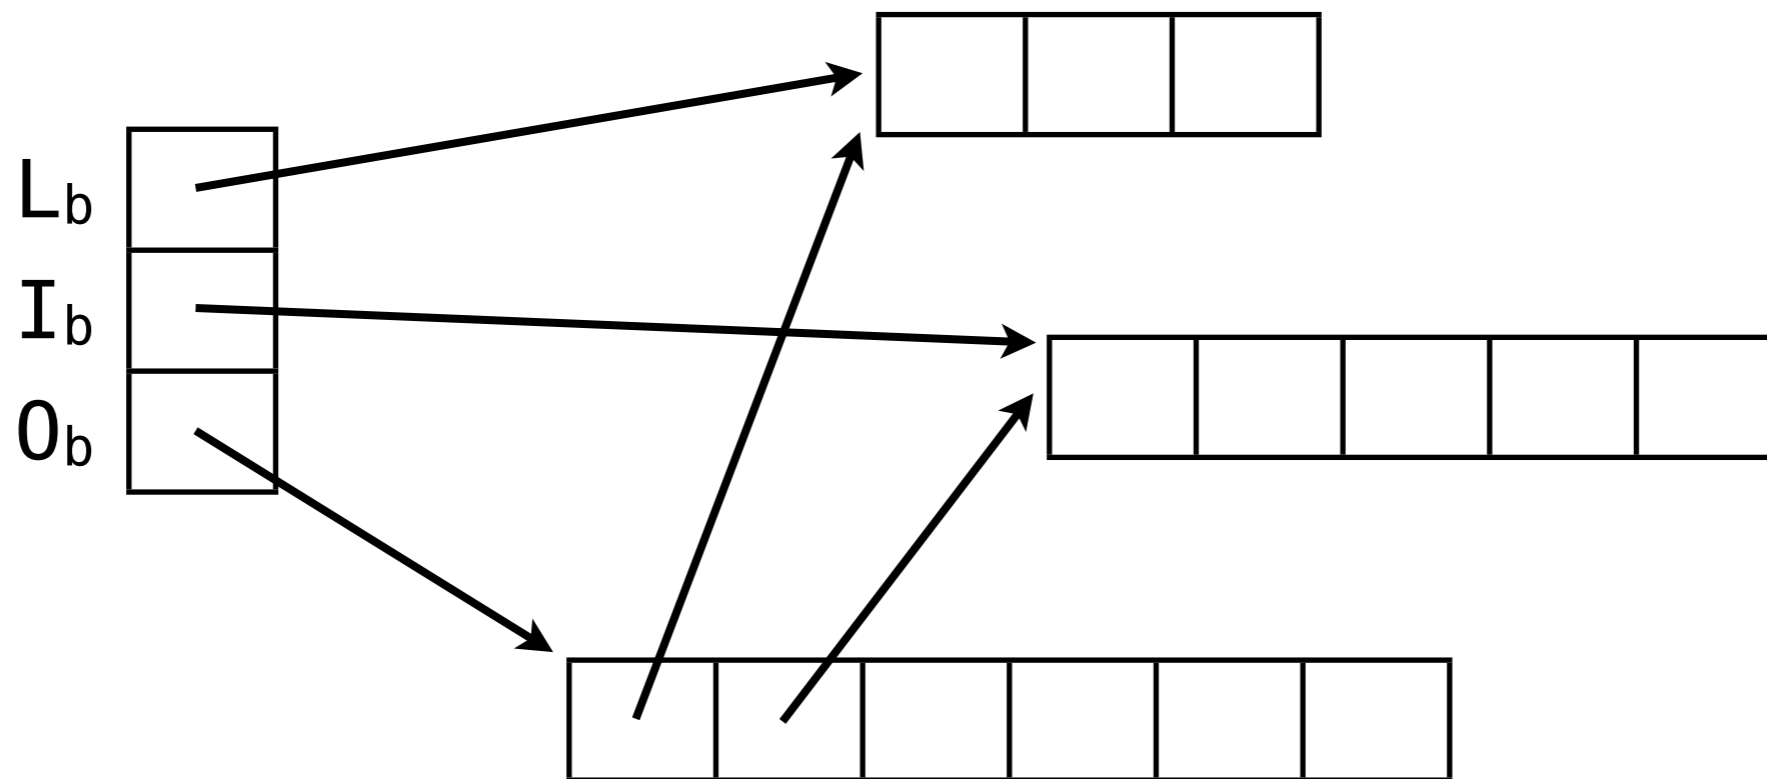


Function call example

The following animation illustrates the saving of the caller's context as well as the installation of the callee's context during a function call:

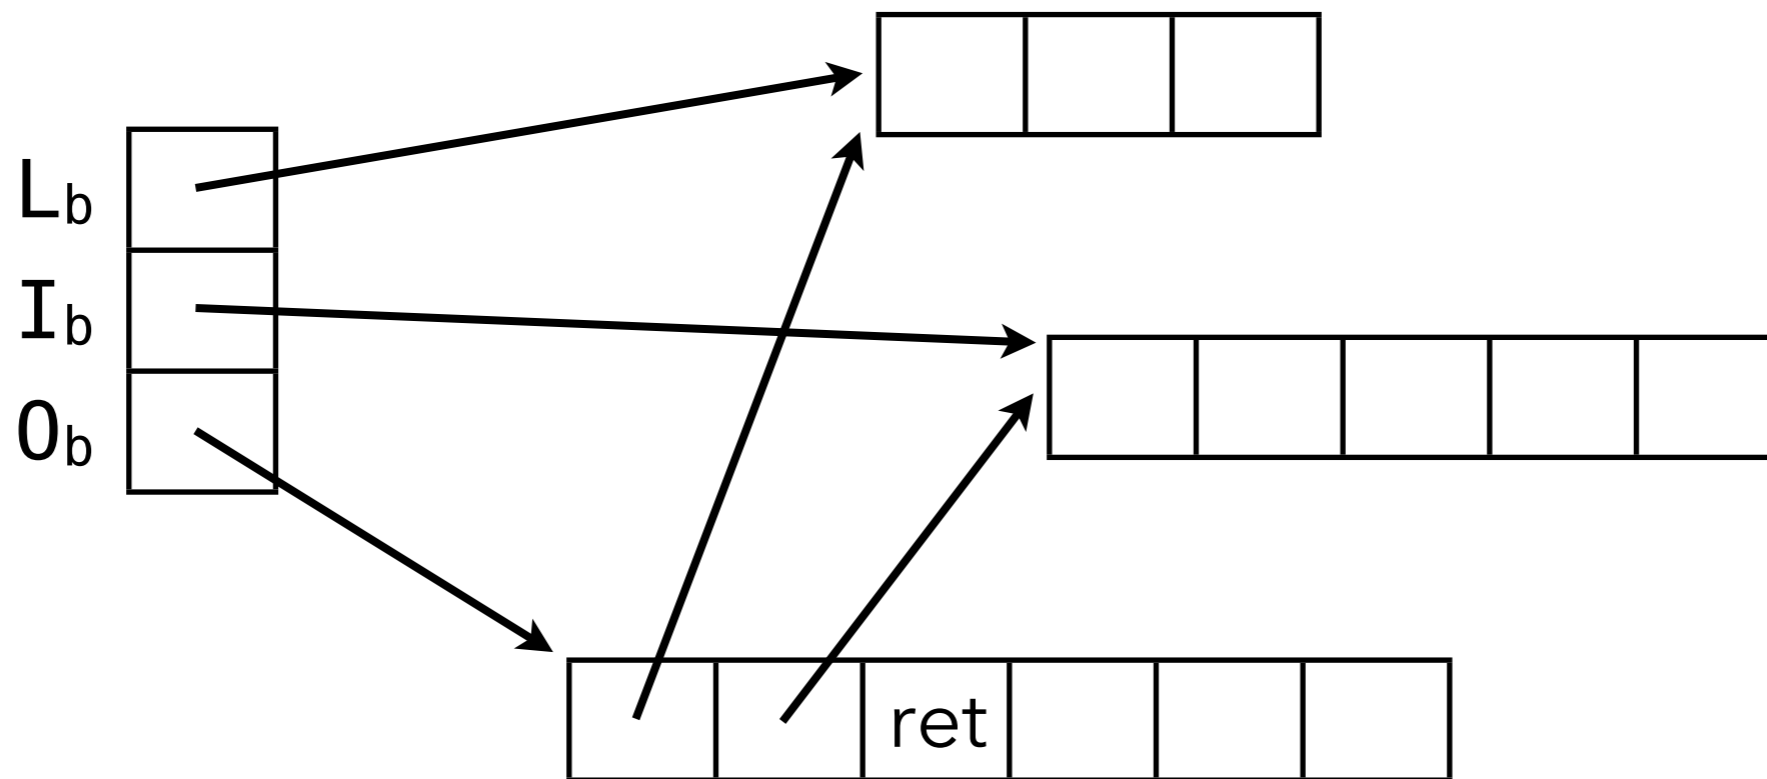


Function call example

The following animation illustrates the saving of the caller's context as well as the installation of the callee's context during a function call:

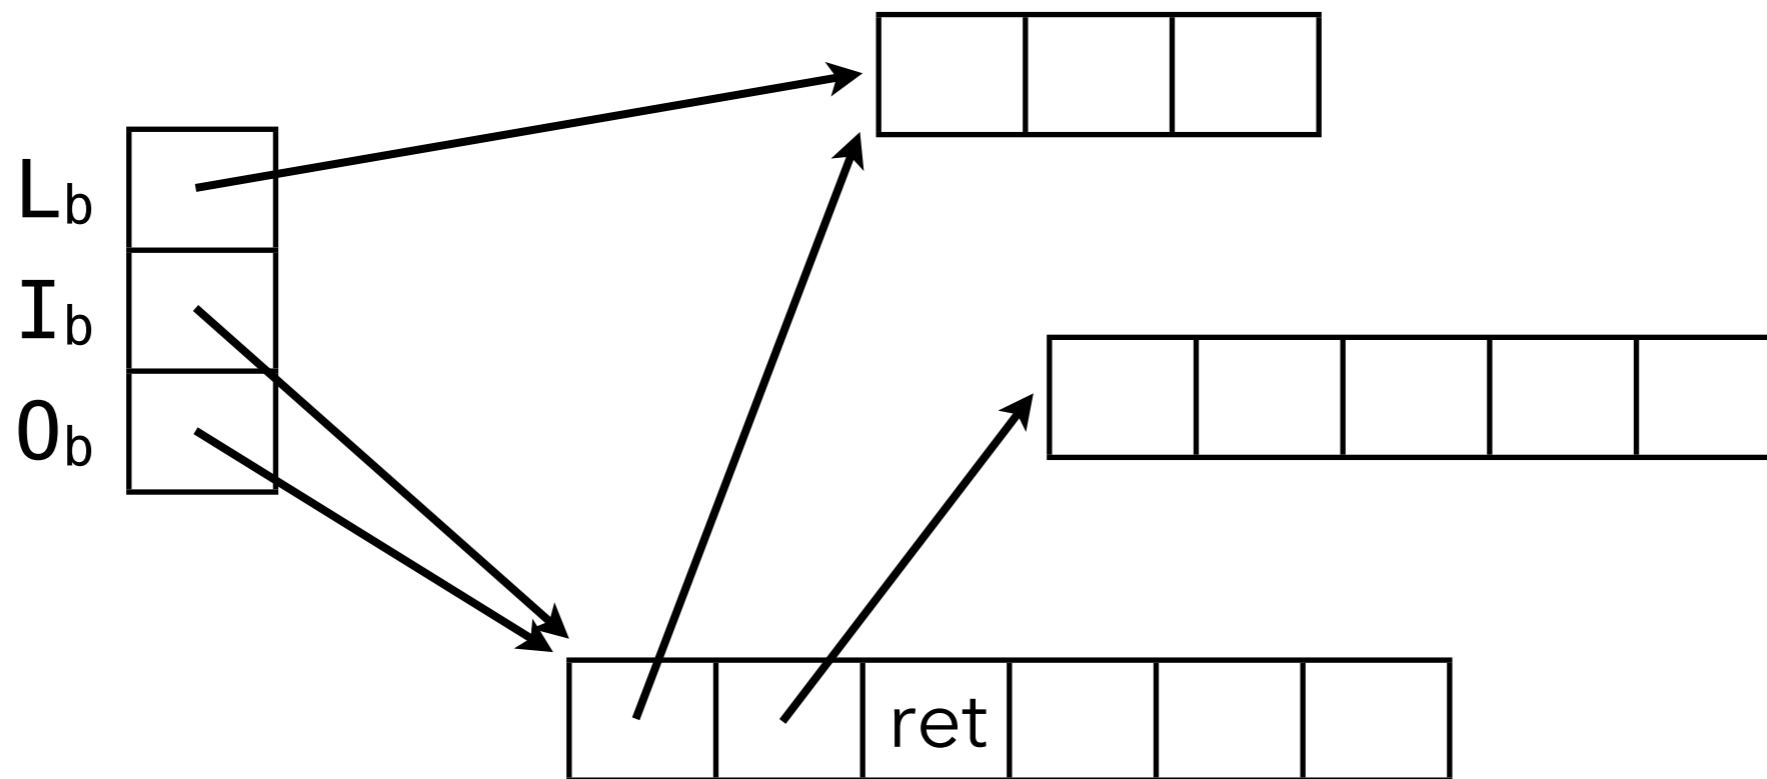


Function call example

The following animation illustrates the saving of the caller's context as well as the installation of the callee's context during a function call:

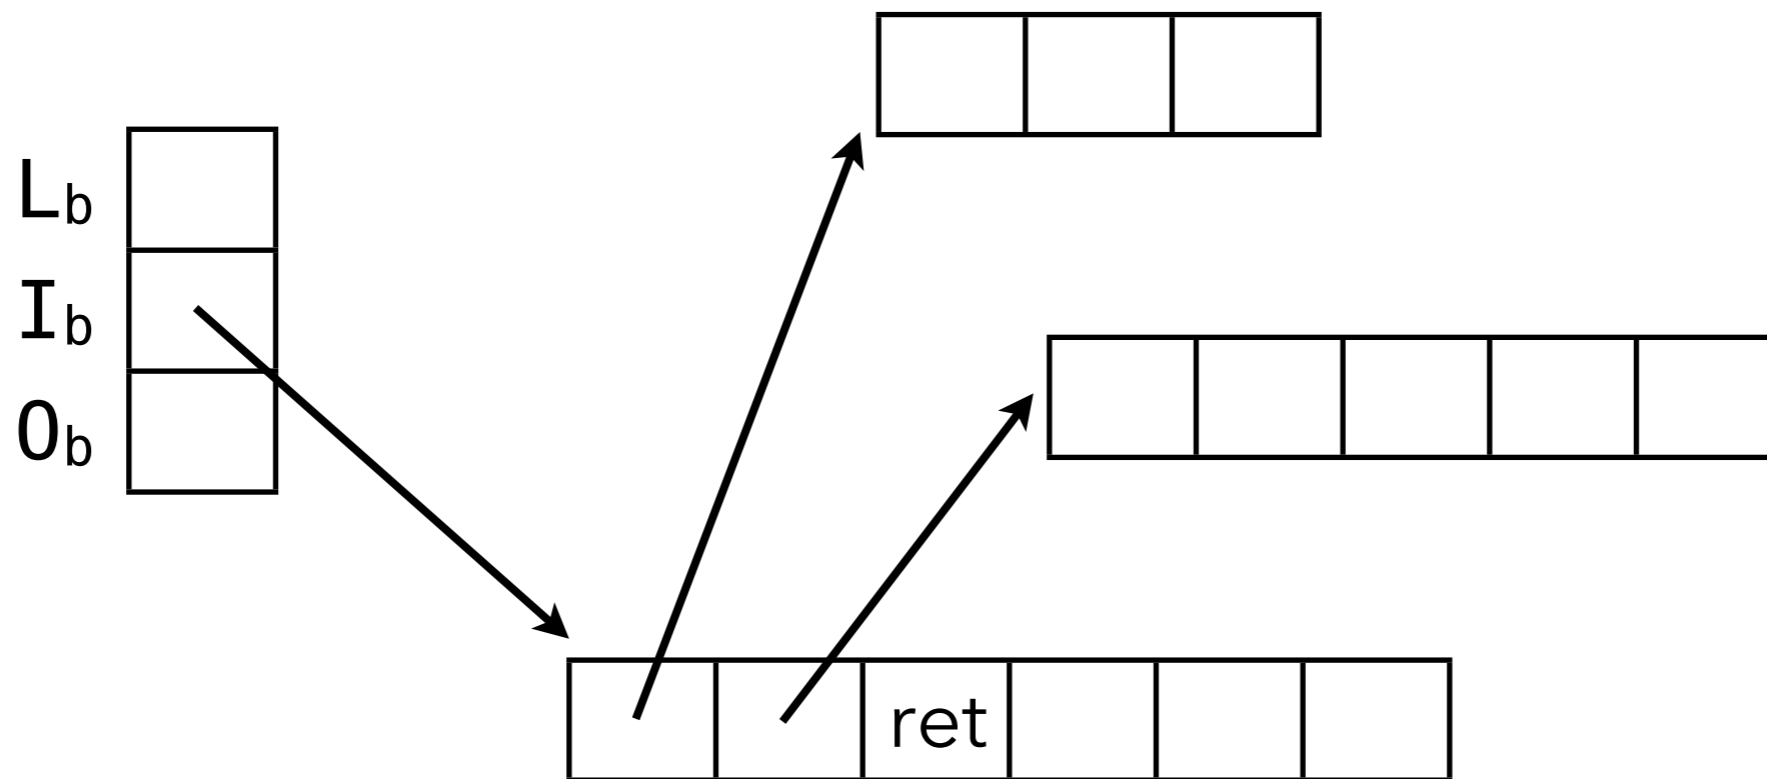


Function call example

The following animation illustrates the restoration of the caller's context during a function return:

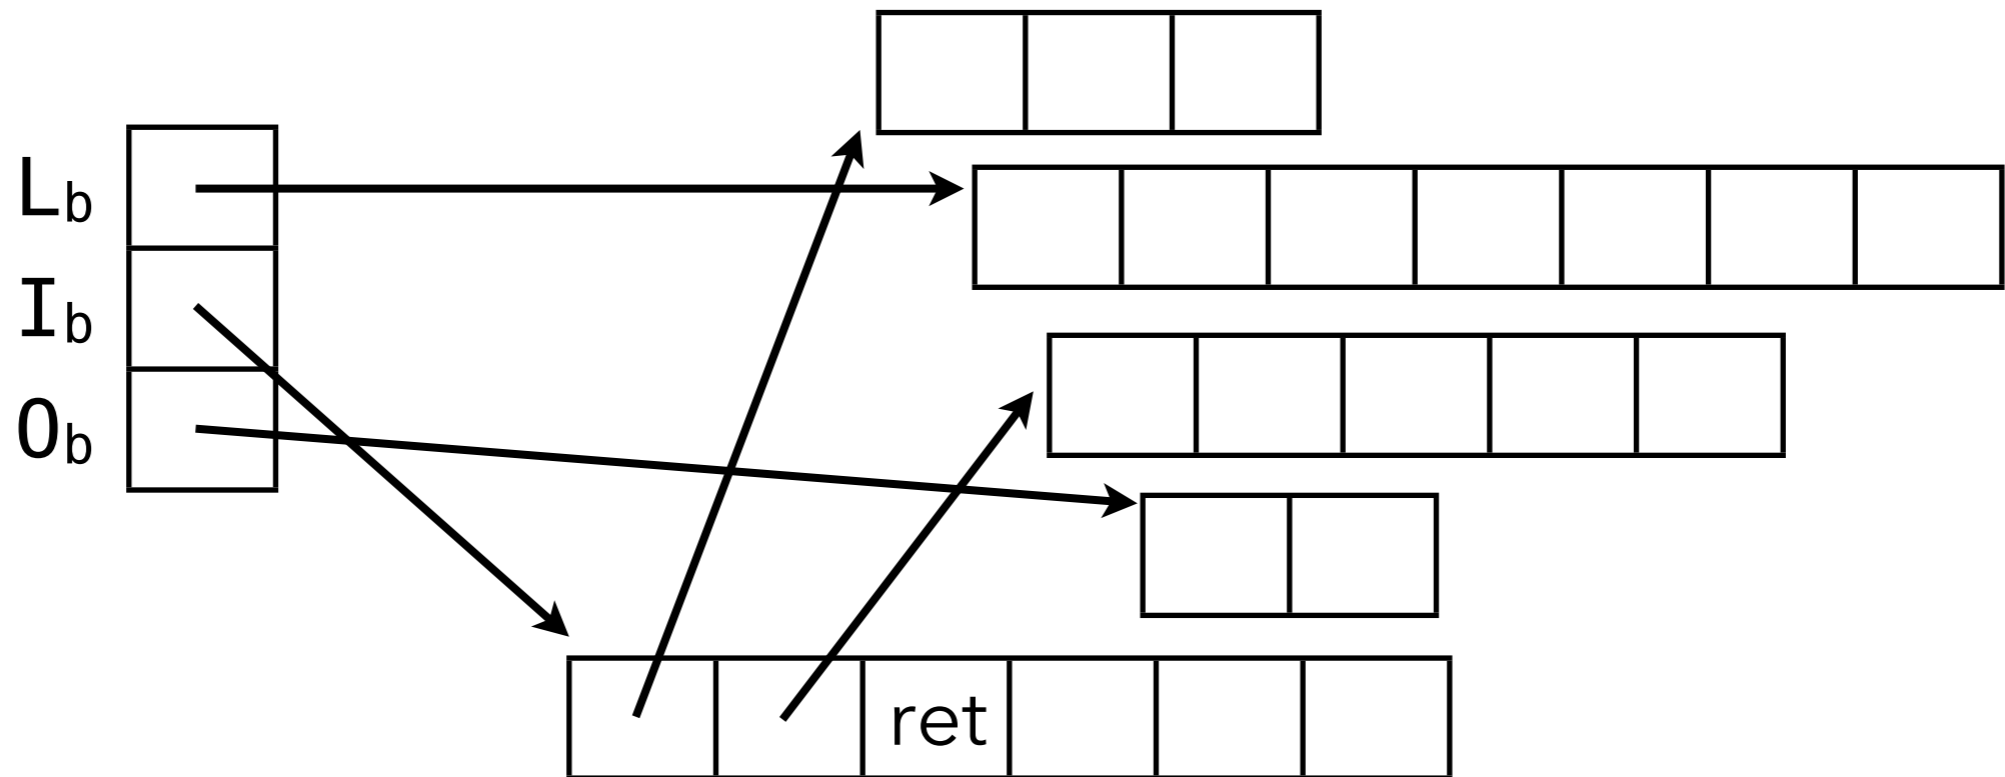


Function call example

The following animation illustrates the restoration of the caller's context during a function return:

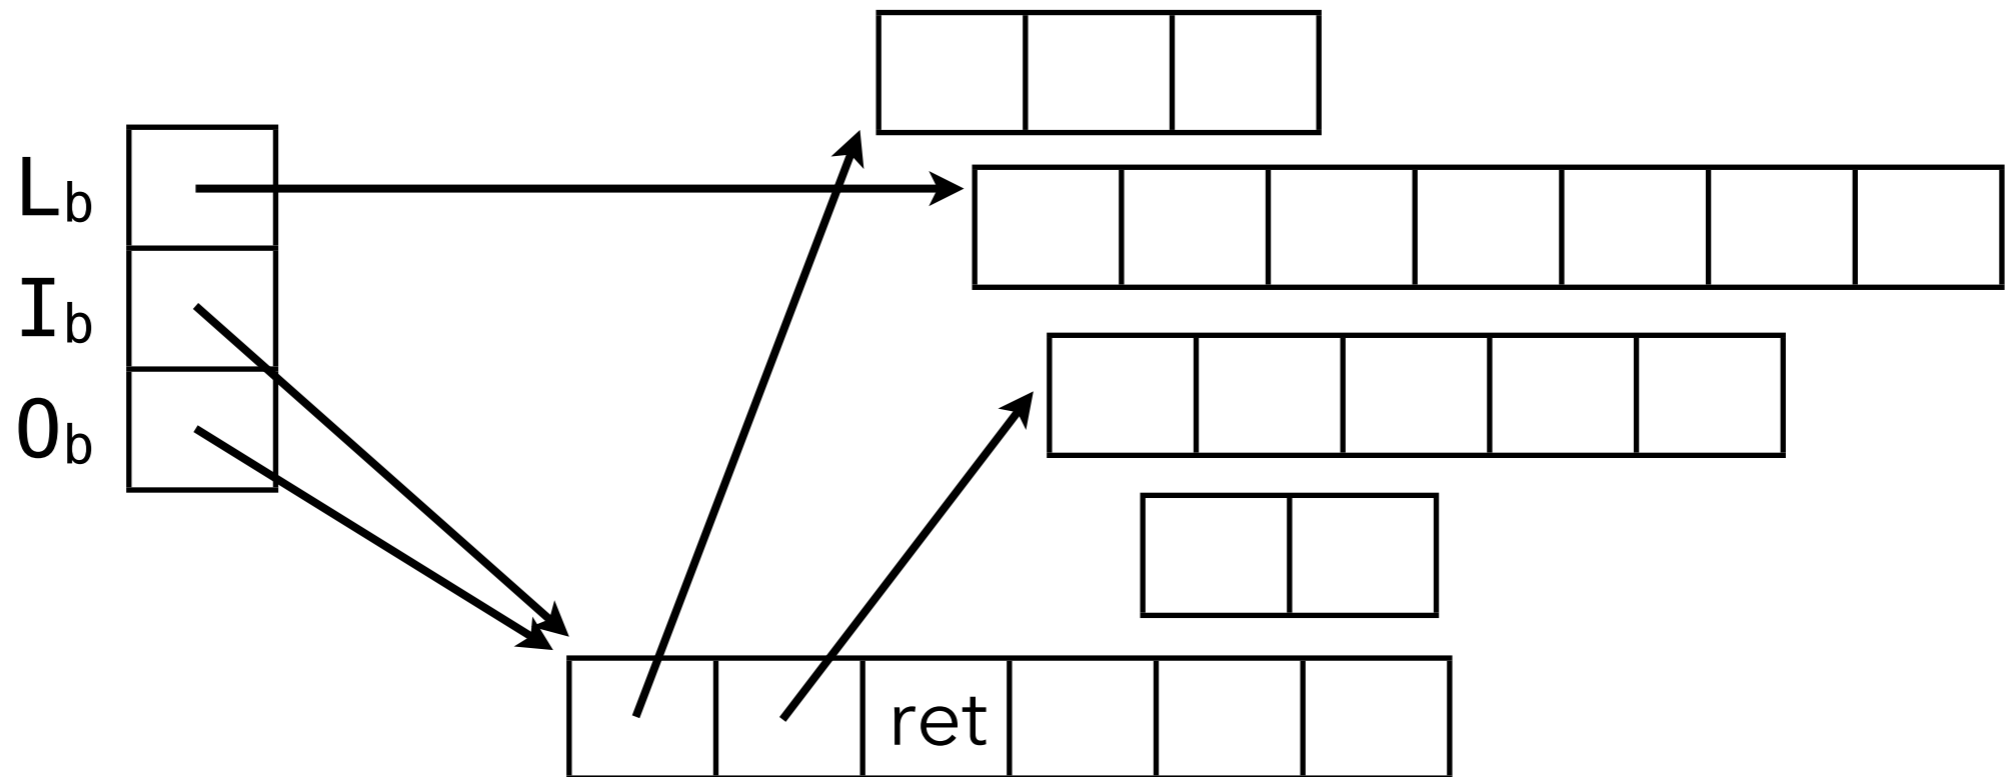


Function call example

The following animation illustrates the restoration of the caller's context during a function return:

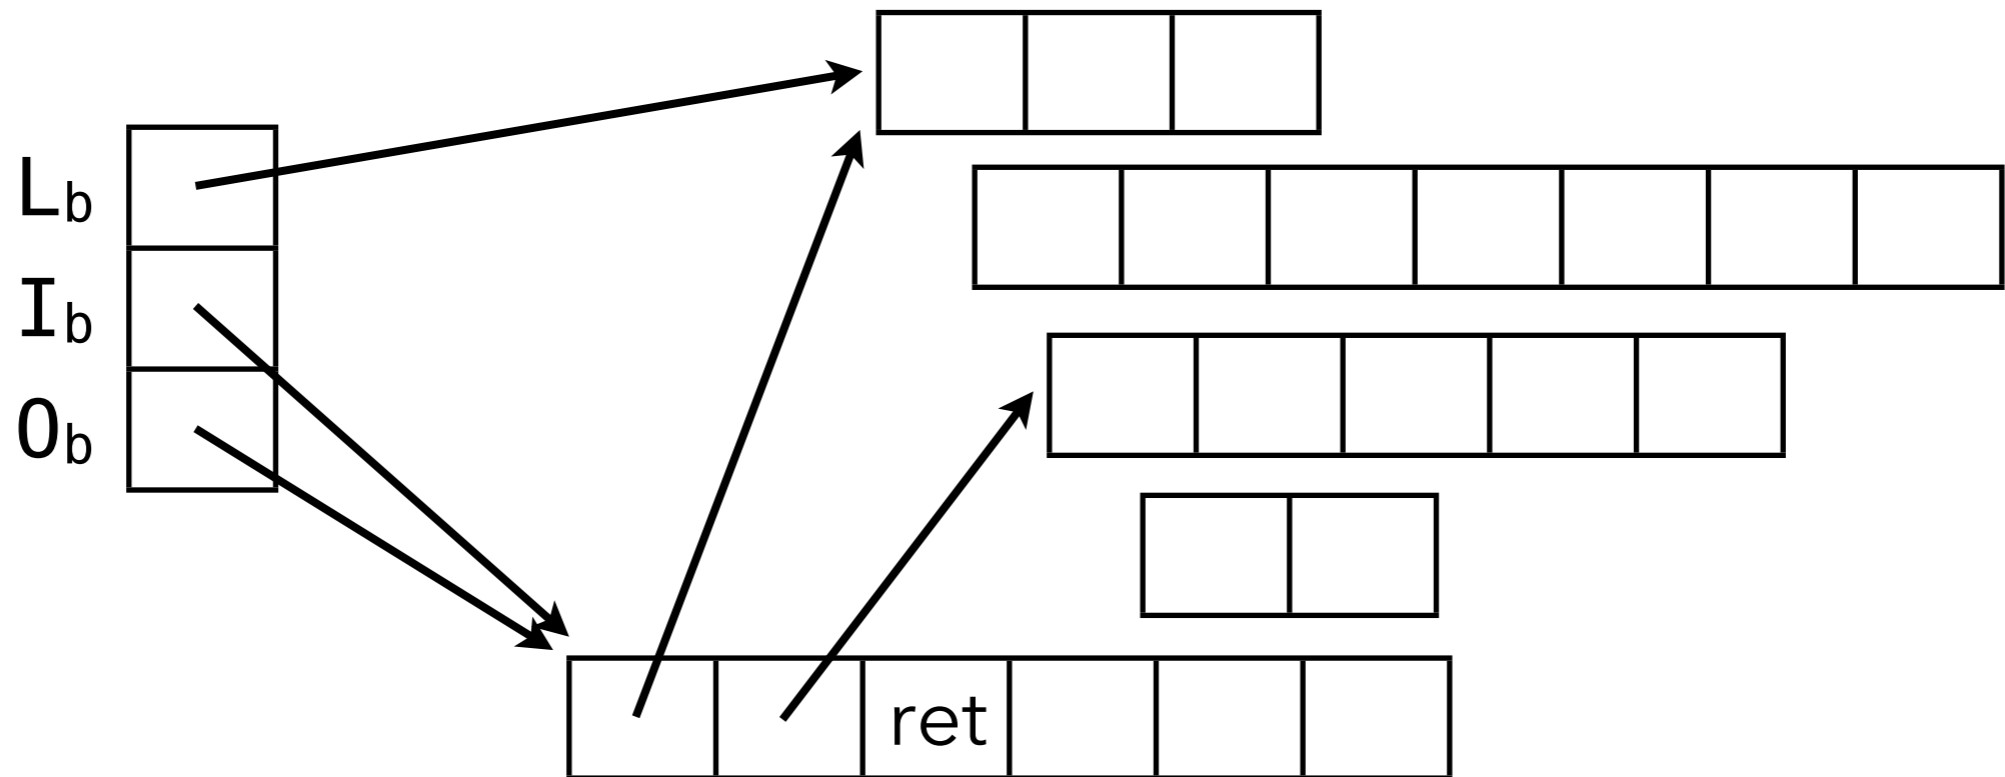


Function call example

The following animation illustrates the restoration of the caller's context during a function return:

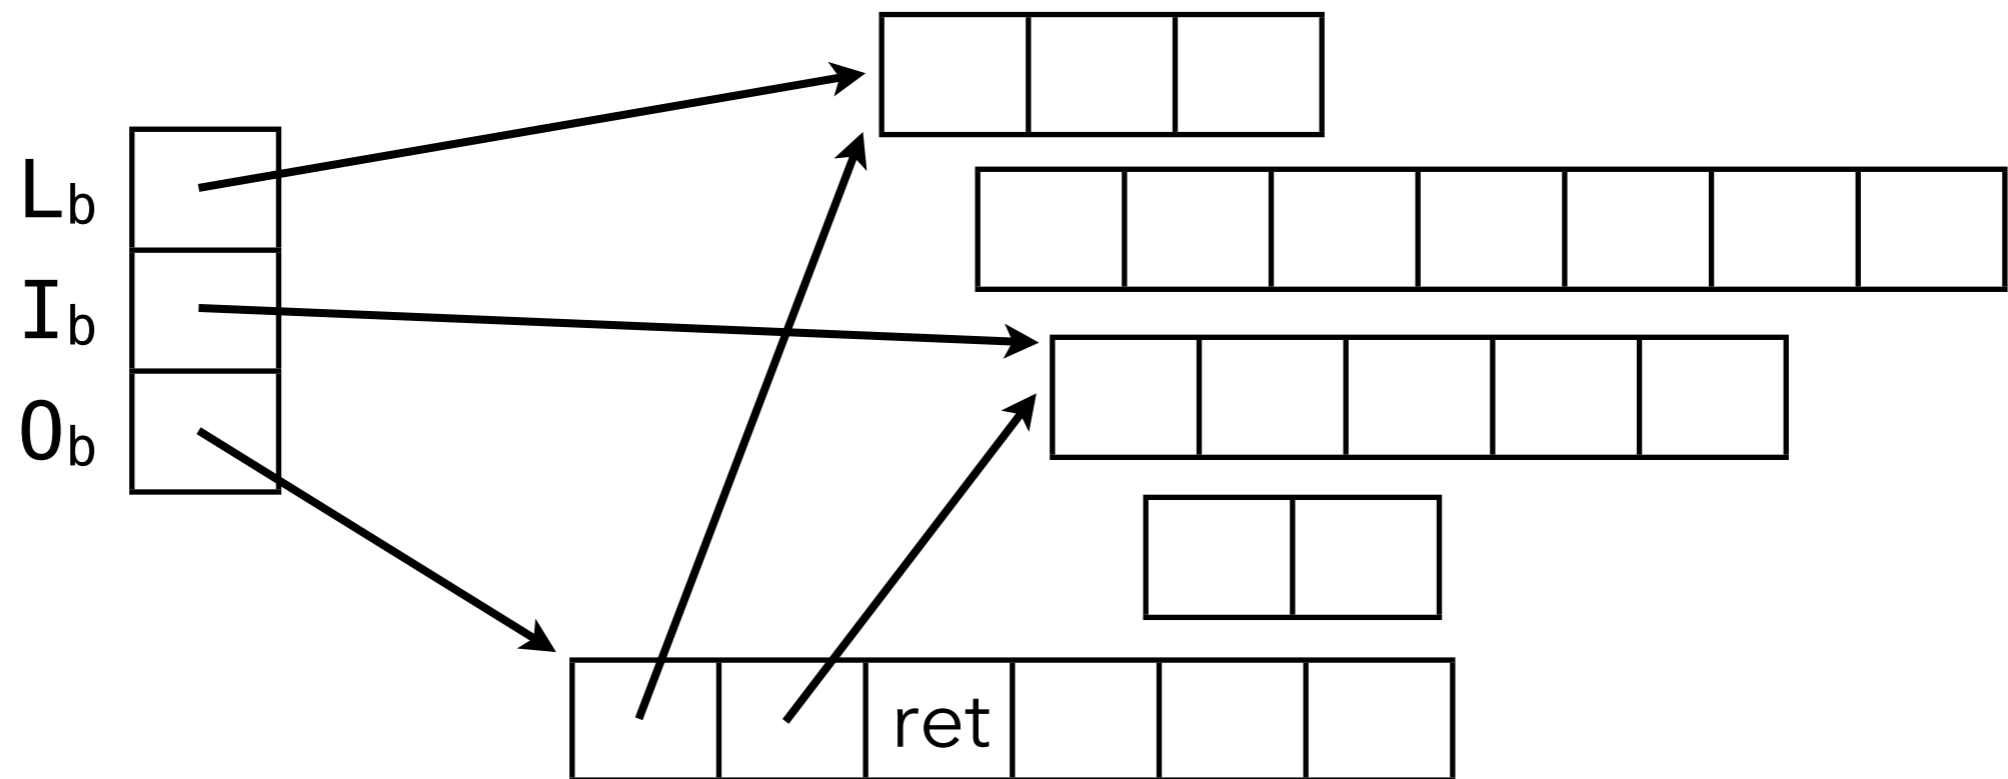

Function call example

The following animation illustrates the restoration of the caller's context during a function return:

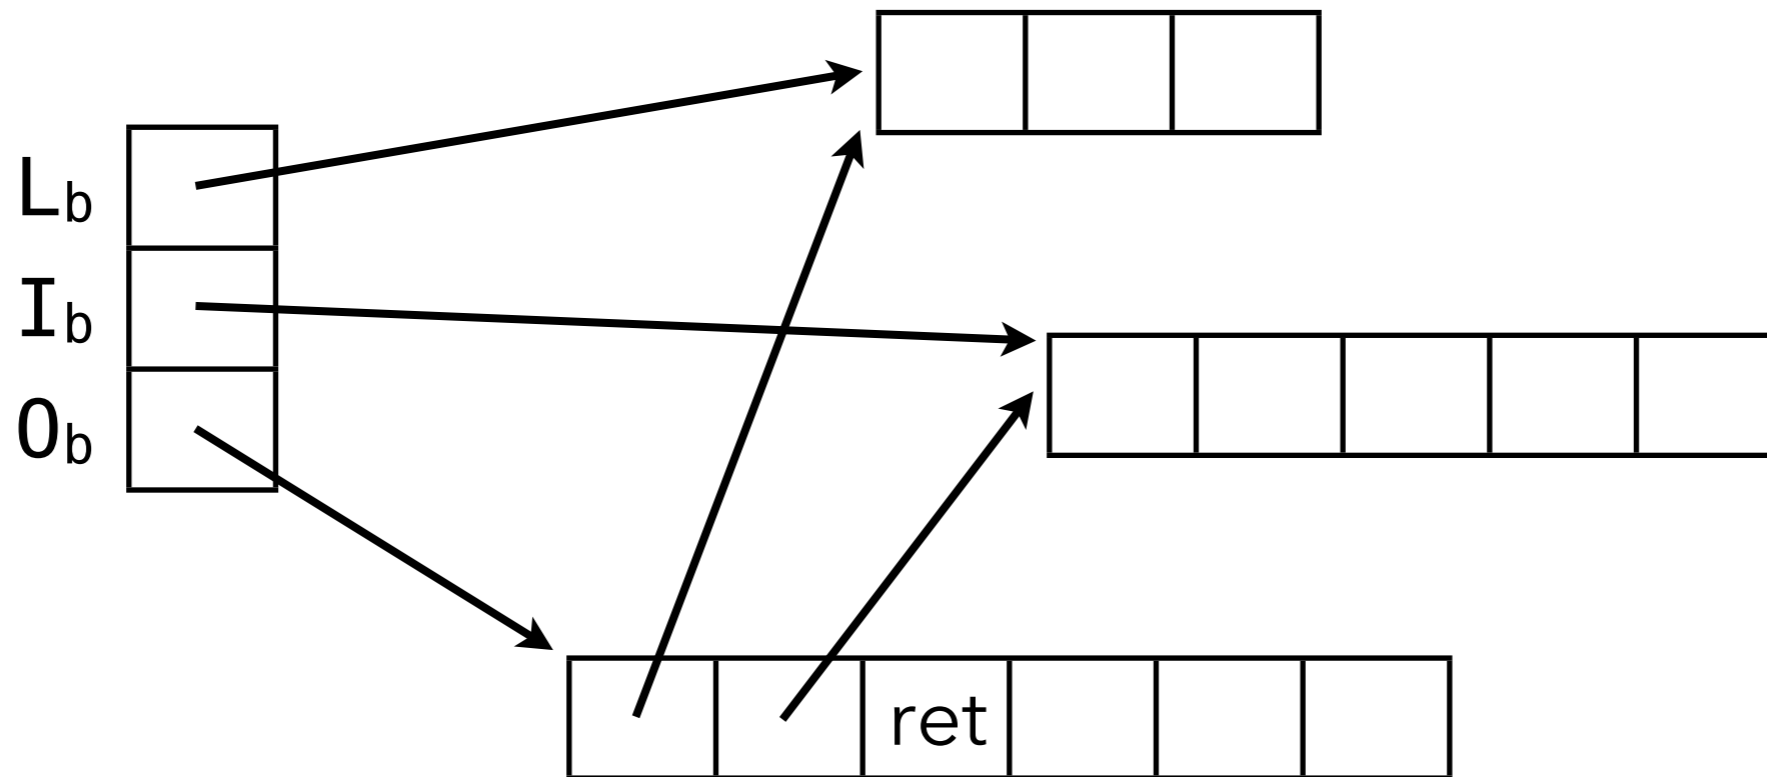

Arithmetic instructions (1)

ADD Ra Rb Rc $Ra \leftarrow Rb + Rc$

SUB Ra Rb Rc $Ra \leftarrow Rb - Rc$

MUL Ra Rb Rc $Ra \leftarrow Rb * Rc$

DIV Ra Rb Rc $Ra \leftarrow Rb / Rc$

MOD Ra Rb Rc $Ra \leftarrow Rb \% Rc$

Ra, Rb, Rc: registers

PC implicitly augmented by 4 by each instruction

Arithmetic instructions (2)

ASL Ra Rb Rc $Ra \leftarrow Rb \ll Rc$

ASR Ra Rb Rc $Ra \leftarrow Rb \gg Rc$

AND Ra Rb Rc $Ra \leftarrow Rb \& Rc$

OR Ra Rb Rc $Ra \leftarrow Rb | Rc$

Ra, Rb, Rc: registers

PC implicitly augmented by 4 by each instruction

Control instructions (1)

JLT $Ra\ Rb\ D^{10}$ if $Ra < Rb$ then $PC \leftarrow PC + 4 \cdot D^{10}$

JLE $Ra\ Rb\ D^{10}$ if $Ra \leq Rb$ then $PC \leftarrow PC + 4 \cdot D^{10}$

JEQ $Ra\ Rb\ D^{10}$ if $Ra = Rb$ then $PC \leftarrow PC + 4 \cdot D^{10}$

JNE $Ra\ Rb\ D^{10}$ if $Ra \neq Rb$ then $PC \leftarrow PC + 4 \cdot D^{10}$

JGE $Ra\ Rb\ D^{10}$ if $Ra \geq Rb$ then $PC \leftarrow PC + 4 \cdot D^{10}$

JGT $Ra\ Rb\ D^{10}$ if $Ra > Rb$ then $PC \leftarrow PC + 4 \cdot D^{10}$

JJ D^{26} $PC \leftarrow PC + 4 \cdot D^{26}$

Ra, Rb, Rc : registers, D^k : k -bit signed displacement

Control instructions (2)

CALL R_a

$O_0 \leftarrow L_b, O_1 \leftarrow I_b, O_2 \leftarrow PC + 4,$
 $I_b \leftarrow O_b, PC \leftarrow R_a$

TCAL R_a

$O_0 \leftarrow I_0, O_1 \leftarrow I_1, O_2 \leftarrow I_2,$
 $I_b \leftarrow O_b, PC \leftarrow R_a$

RET

$O_b \leftarrow I_b,$
 $L_b \leftarrow O_0, I_b \leftarrow O_1, PC \leftarrow O_2$

HALT

stop execution

R_a : register

Register instructions

LDL0 Ra, S^{18} $Ra \leftarrow S^{18}$

LDHI Ra, U^{16} $Ra \leftarrow (U^{16} \ll 16) | (Ra \& \text{FFFF}_{16})$

MOVE Ra, Rb $Ra \leftarrow Rb$

RALO B, U^8 $B \leftarrow$ new block of size U^8 and tag 201

Ra, Rb : registers, B : base register ($\mathbf{I}_b, \mathbf{L}_b$ or \mathbf{O}_b),
 S^k : k -bit signed constant, U^k : k -bit unsigned constant
PC implicitly augmented by 4 by each instruction

Block instructions

BALO $R_a R_b T^8$ $R_a \leftarrow$ new block of size R_b and tag T^8

BSIZ $R_a R_b$ $R_a \leftarrow$ size of block R_b

BTAG $R_a R_b$ $R_a \leftarrow$ tag of block R_b

BGET $R_a R_b R_c$ $R_a \leftarrow$ element at index R_c of block R_b

BSET $R_a R_b R_c$ element at index R_c of block $R_b \leftarrow R_a$

R_a, R_b, R_c : registers, T^8 : 8-bit block tag

PC implicitly augmented by 4 by each instruction

I/O instructions

CREA Ra $Ra \leftarrow$ character read from console

CPRI Ra print character Ra to console

Ra : register

PC implicitly augmented by 4 by each instruction

Example

The factorial in (hand-coded) L₃VM assembly:

```
fact:   RALO  Lb, 1
        RALO  0b, 4
        LDLO  L0, 0
        JNE   L0, I3, else
        LDLO  I3, 1
        RET
else:   LDLO  L0, 1
        SUB   03, I3, L0
        LDLO  L0, fact
        CALL  L0
        MUL   I3, I3, 03
        RET
```

Exercise

Explain why the **TCAL** instruction does tail call elimination.