


More Functions on Lists

List Methods (1)

Sublists and element access:

<code>xs.length</code>	The number of elements of <code>xs</code> .
<code>xs.last</code>	The list's last element, exception if <code>xs</code> is empty.
<code>xs.init</code>	A list consisting of all elements of <code>xs</code> except the last one, exception if <code>xs</code> is empty.
<code>xs take n</code>	A list consisting of the first <code>n</code> elements of <code>xs</code> , or <code>xs</code> itself if it is shorter than <code>n</code> .
<code>xs drop n</code>	The rest of the collection after taking <code>n</code> elements.
<code>xs(n)</code>	(or, written out, <code>xs apply n</code>). The element of <code>xs</code> at index <code>n</code> .

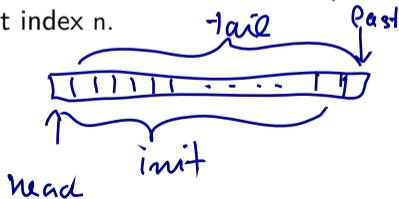

List Methods (2)

Creating new lists:

- | | |
|--------------------------------|--|
| <code>xs ++ ys</code> | The list consisting of all elements of <code>xs</code> followed by all elements of <code>ys</code> . |
| <code>xs.reverse</code> | The list containing the elements of <code>xs</code> in reversed order. |
| <code>xs updated (n, x)</code> | The list containing the same elements as <code>xs</code> , except at index <code>n</code> where it contains <code>x</code> . |

Finding elements:

- | | |
|----------------------------|---|
| <code>xs indexOf x</code> | The index of the first element in <code>xs</code> equal to <code>x</code> , or <code>-1</code> if <code>x</code> does not appear in <code>xs</code> . |
| <code>xs contains x</code> | same as <code>xs indexOf x >= 0</code> |

Implementation of last

The complexity of head is (small) constant time.

What is the complexity of last?

To find out, let's write a possible implementation of last as a stand-alone function.

```
def last[T](xs: List[T]): T = xs match {  
  case List() => throw new Error("last of empty list")  
  case List(x) =>  
  case y :: ys =>  
}
```

Implementation of last

The complexity of head is (small) constant time.

What is the complexity of last?

To find out, let's write a possible implementation of last as a stand-alone function.

```
def last[T](xs: List[T]): T = xs match {  
  case List() => throw new Error("last of empty list")  
  case List(x) => x  
  case y :: ys =>  
}
```

Implementation of last

The complexity of head is (small) constant time.

What is the complexity of last?

To find out, let's write a possible implementation of last as a stand-alone function.

```
def last[T](xs: List[T]): T = xs match {  
  case List() => throw new Error("last of empty list")  
  case List(x) => x  
  case y :: ys => last(ys)  
}
```

Implementation of last

The complexity of head is (small) constant time.

What is the complexity of last?

To find out, let's write a possible implementation of last as a stand-alone function.

```
def last[T](xs: List[T]): T = xs match {  
  case List() => throw new Error("last of empty list")  
  case List(x) => x  
  case y :: ys => last(ys)  
}
```

So, last takes steps proportional to the length of the list xs.

Exercise

Implement `init` as an external function, analogous to `last`.

```
def init[T](xs: List[T]): List[T] = xs match {  
  case List() => throw new Error("init of empty list")  
  case List(x) => ???  
  case y :: ys => ???  
}
```


Exercise

Implement `init` as an external function, analogous to `last`.

```
def init[T](xs: List[T]): List[T] = xs match {  
  case List() => throw new Error("init of empty list")  
  case List(x) =>  
  case y :: ys =>  
}
```

Implementation of Concatenation

How can concatenation be implemented?

Let's try by writing a stand-alone function:

```
def concat[T](xs: List[T], ys: List[T]) =
```

Implementation of Concatenation

How can concatenation be implemented?

Let's try by writing a stand-alone function:

```
def concat[T](xs: List[T], ys: List[T]) = xs match {  
  case List() =>  
  case z :: zs =>  
}
```

Implementation of Concatenation

How can concatenation be implemented?

Let's try by writing a stand-alone function:

```
def concat[T](xs: List[T], ys: List[T]) = xs match {  
  case List() => ys  
  case z :: zs =>  
}
```

Implementation of Concatenation

How can concatenation be implemented?

Let's try by writing a stand-alone function:

```
def concat[T](xs: List[T], ys: List[T]) = xs match {  
  case List() => ys  
  case z :: zs => z :: concat(zs, ys)  
}
```

Implementation of Concatenation

How can concatenation be implemented?

Let's try by writing a stand-alone function:

```
def concat[T](xs: List[T], ys: List[T]) = xs match {  
  case List() => ys  
  case z :: zs => z :: concat(zs, ys)  
}
```

What is the complexity of concat? $|xs|$

Implementation of reverse

How can reverse be implemented?

Let's try by writing a stand-alone function:

```
def reverse[T](xs: List[T]): List[T] = xs match {  
  case List() => xs  
  case y :: ys => reverse(ys) ++ List(y)  
}
```

Implementation of reverse

How can reverse be implemented?

Let's try by writing a stand-alone function:

```
def reverse[T](xs: List[T]): List[T] = xs match {  
  case List() => List()  
  case y :: ys => reverse(ys) ++ List(y)  
}
```


Implementation of reverse

How can reverse be implemented?

Let's try by writing a stand-alone function:

```
def reverse[T](xs: List[T]): List[T] = xs match {  
  case List() => List()  
  case y :: ys => reverse(ys) ++ List(y)  
}
```

$n * n$

What is the complexity of reverse?

Can we do better? (to be solved later).

Exercise

Remove the n'th element of a list xs. If n is out of bounds, return xs itself.

```
def removeAt[T](xs: List[T], n: Int) = ???
```

Usage example:

```
removeAt(1, List('a', 'b', 'c', 'd')) > List(a, c, d)
```

Exercise (Harder, Optional)

Flatten a list structure:

```
def flatten(xs: List[Any]): List[Any] = ???
```

```
flatten(List(List(1, 1), 2, List(3, List(5, 8))))  
  > res0: List[Any] = List(1, 1, 2, 3, 5, 8)
```